

GROUNDING ATTACHMENTS

- Mounts directly to the axle of the stringing block (only compatible with DDIN blocks)
- Uses a heavy-duty spring assembly to keep the roller in constant contact with the conductor
- 4-1/2" x 3/4" ground stud can accept virtually any clamp




PART #	ARBOR HOLE	WEIGHT
DNBG12	Use with DNSB12U	10 lbs.
DNBG16	Use with DNSB16U	11 lbs.
DNBG22-28	Use with DNSB22U & DNSB28U	22 lbs.
DNBGV16	Use with DNSBW16U	13.5 lbs.
DNBGV22-28	Use with DNSBW22U & DNSBW28U	23 lbs.
DNBGV36	Factory Install Only - Use with DNSBW36U	78 lbs.
DNBGV42	Factory Install Only - Use with DNSBW42U	80 lbs.

ORDER FROM:

UNIVERSAL GROUNDING ATTACHMENT

- Mounts on any 12" through 36" stringing block with a standard ball socket
- Roller has 4 mounting locations to adjust for block size used
- Accommodates all conductor sizes
- Spring-loaded design to maintain constant contact with the conductor
- Mesh grips and swivels can pass through the roller without impacting functionality

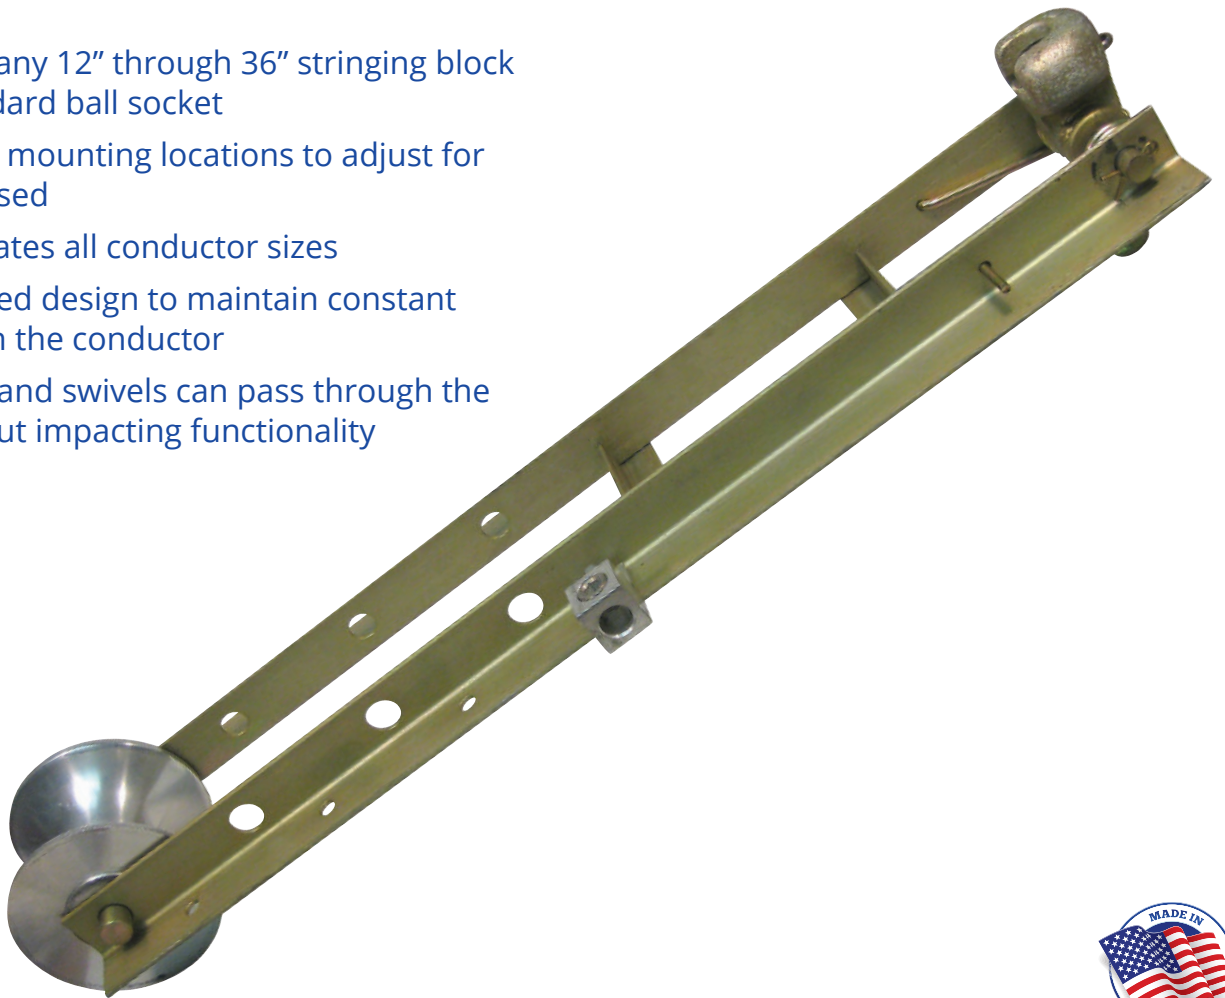

PART #	DESCRIPTION	WIRE CAPACITY	WEIGHT
DN12-36	Fits 12" - 36"	0.198" - 2.5"	13 lbs.

ORDER FROM: