


22" RADIUS BLOCKS

- Lightweight and durable
- Used in place of full diameter stringing blocks
- Rotates freely from a vertical to a horizontal position for use on corner structures
- Sealed bearings



AVAILABLE SHEAVES:

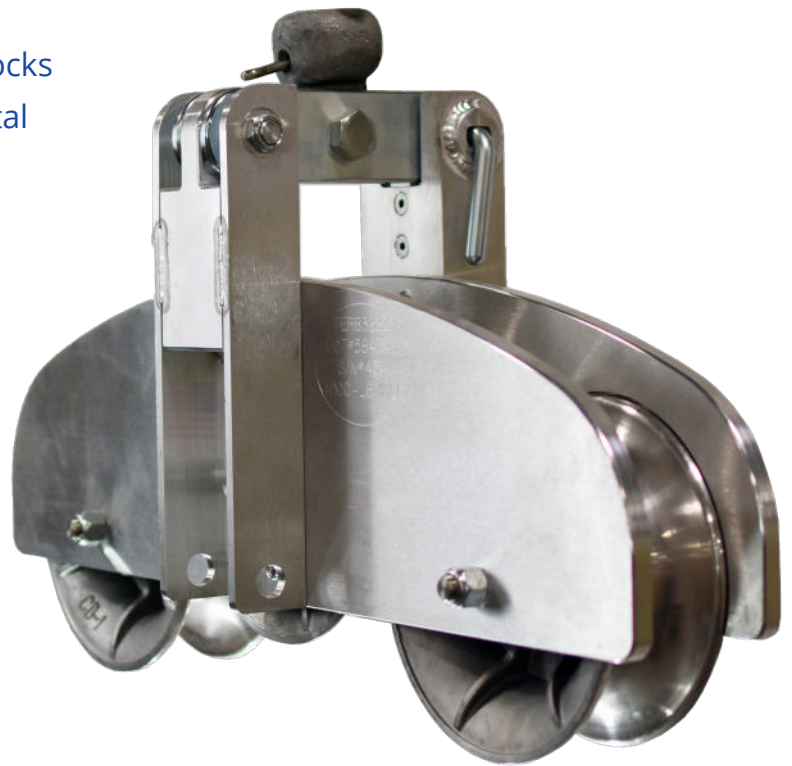

Aluminum



Ductile Iron



Urethane Lined




PART #	SHEAVE	SHEAVE WIDTH	SHEAVE DIAMETER	CABLE DIAMETER	DIMENSIONS	WLL	WEIGHT
DNRB3222-AL	Aluminum	3"	7"	2-1/4"	16"H x 23-1/2" L	4,000 lbs.	30 lbs.
DNRB3222-DI	Ductile Iron	3"	7"	2-1/4"	16"H X 23-1/2" L	4,000 lbs.	43 lbs.
DNRB3222-LS	Urethane Lined	3"	7"	2"	16"H x 23-1/2" L	4,000 lbs.	32 lbs.

ORDER FROM:

24" RADIUS BLOCKS

- Lightweight and durable
- Used in place of full diameter stringing blocks
- Rotates freely from a vertical to a horizontal position for use on corner structures
- Sealed bearings

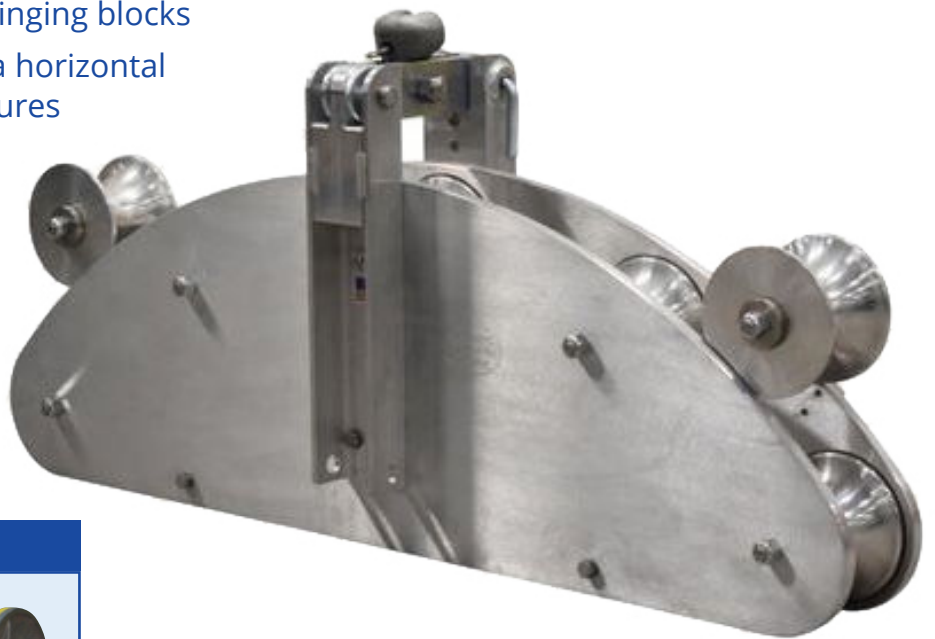

AVAILABLE SHEAVES:



Aluminum



Ductile Iron



Urethane Lined



PART #	SHEAVE	SHEAVE WIDTH	SHEAVE DIAMETER	CABLE DIAMETER	DIMENSIONS	WLL	WEIGHT
DNRB5324-AL	Aluminum	3-1/2"	5"	2-3/4"	19" H x 40" L	4,000 lbs.	72 lbs.
DNRB5324-DI	Ductile Iron	3-1/2"	5"	2-3/4"	19" H x 40" L	4,000 lbs.	88 lbs.
DNRB5324-LS	Urethane Lined	3-1/2"	5"	2-1/2"	19"H x 40" L	4,000 lbs.	74 lbs.

ORDER FROM: