

# DDIN<sup>®</sup>

*BUILT FOR LINEMEN*



PRODUCT CATALOG

# TABLE OF CONTENTS

<i>FEATURED PRODUCTS</i>	<b>4</b>
<i>UNIVERSAL BLOCKS</i>	<b>6</b>
<i>MOUNTING BRACKETS &amp; ATTACHMENTS</i>	<b>9</b>
<i>STRINGING BLOCKS</i>	<b>10</b>
<i>HELICOPTER BLOCKS</i>	<b>12</b>
<i>TANDEM BLOCKS</i>	<b>14</b>
<i>UPLIFT/HOLD DOWN &amp; RADIUS BLOCKS</i>	<b>16</b>
<i>TRAVELING GROUNDS</i>	<b>18</b>
<i>SAGGING EQUIPMENT &amp; CLIPPING HOOKS</i>	<b>20</b>
<i>RIGGING &amp; HANDLINE BLOCKS</i>	<b>22</b>
<i>HANDLINE HOOKS &amp; LIFTERS</i>	<b>24</b>
<i>TRANSFORMER SLINGS</i>	<b>25</b>
<i>POLE PULLING &amp; SETTING</i>	<b>28</b>
<i>GROUND CLAMPS &amp; GROUNDING ACCESSORIES</i>	<b>30</b>
<i>ADAPTERS &amp; SOCKETS</i>	<b>32</b>
<i>STORAGE SOLUTIONS</i>	<b>33</b>
<i>PRE-SPLICE CUTTERS &amp; BUSHINGS</i>	<b>34</b>
<i>COMPRESSION DIES</i>	<b>41</b>
<i>ACCESSORIES</i>	<b>44</b>
<i>ACSR WIRE CHART</i>	<b>51</b>
<i>INDEX</i>	<b>52</b>





## ***BUILT FOR LINEMEN***

In the years Tony Bozell spent as a lineman, he experienced firsthand the necessity of top-quality tools and equipment in the utility industry. He also saw the need for innovation in the development of new and more durable tools that would improve the lives of linemen in the field. It was this experience that led him to create DDIN.

Tony and the rest of the team at DDIN have spent years brainstorming and developing ways to make lineman tools better. From line stringing and line sagging to pole pulling and setting, the goal has always been to identify a need and come up with a solution. Sometimes this means taking an existing tool and improving the design and manufacture, and sometimes this means creating a new tool altogether. In every case, this means creating the toughest tools possible to withstand the wear and tear of real-world use.

To achieve our goal of being tougher than the rest, DDIN does as much manufacturing in the United States as possible: a statement we are proud to stand behind. DDIN lineman products are made from only the best materials and rigorously tested to ensure they meet lineman standards.

We mean it when we say that DDIN products are ***built for linemen***.



# FEATURED PRODUCTS



## TRI-CLAMP

- Patented, multi-plane clamp that cradles bolts securely and clasps itself to the mounting pad of a connecting jumper line
- The resulting bolt stability creates a process efficiency that cuts connecting times by as much as 65% for moving hot jumpers
- Starter socket that holds a nut, lock washer, and washer in alignment simultaneously
- Eliminates dropped washers, facilitates faster connections and reduces linemen exposure



**WATCH THE TRI-CLAMP IN ACTION!**



PART #	DESCRIPTION	WEIGHT
DNTRI-KIT	(1) 2-Bolt Clamp, (1) 4-Bolt Clamp, (2) Tri-Clamp Hot Socket, (1) Case	8.4 lbs.
DNTRI-S34	Tri-Clamp Hot Socket Only	1 lb.



FROM LINE STRINGING TO POLE PULLING AND SETTING, THE GOAL HAS ALWAYS BEEN TO IDENTIFY A NEED AND COME UP WITH A SOLUTION.



DNWC5

## GROUND CLAMPS

- Smooth jaw
- Exclusive "Rapid Advance" eye screw technology which allows the jaw to close in half the turns compared to standard clamps
- Stainless steel hex head strain relief bolts
- Accepts standard 5/8-11 UNC threaded ferrules


PART #	MATERIAL	CLAMP CAPACITY	CONTINUOUS	FAULT CURRENT 15 CYCLES	WEIGHT
DNWC5	Aluminum	0.128" to 1.250"	400 Amps	5H/47,000 Amps	1.7 lbs.
DNWC6	Aluminum	0.162" to 2.00"	400 Amps	5H/47,000 Amps	1.9 lbs.





# FEATURED PRODUCTS

## CLIPPING BLOCK

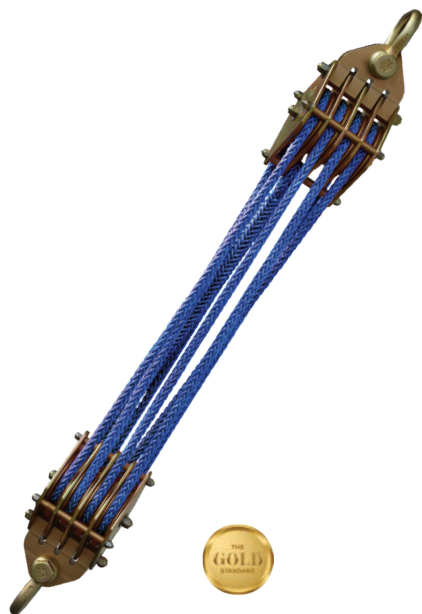


- Eight part block and tackle style
- Available with either of the following:
  - 5/8" Samson Tenex Synthetic Rope (Red)
  - 5/8" Samson Amsteel Blue Synthetic Rope (Blue)\*
- *\*Increased cut protection*
- Each unit is tagged and serialized
- Designed at a 5:1 Safety Factor

*Specify rope length when ordering.  
Contact us for custom rope lengths.  
Always inspect rope prior to each use.*



PART #	DESCRIPTION	ROPE LENGTH	WLL
DNCB8P-ASB10-BLU-150	Amsteel Blue	150 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-200	Amsteel Blue	200 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-250	Amsteel Blue	250 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-300	Amsteel Blue	300 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-350	Amsteel Blue	350 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-400	Amsteel Blue	400 ft.	19,000 lbs.
DNCB8P-ASB10-BLU-450	Amsteel Blue	450 ft.	19,000 lbs.
DNCB8P-TN10-RED-150	Tenex Red	150 ft.	19,000 lbs.
DNCB8P-TN10-RED-200	Tenex Red	200 ft.	19,000 lbs.
DNCB8P-TN10-RED-250	Tenex Red	250 ft.	19,000 lbs.
DNCB8P-TN10-RED-300	Tenex Red	300 ft.	19,000 lbs.
DNCB8P-TN10-RED-350	Tenex Red	350 ft.	19,000 lbs.
DNCB8P-TN10-RED-400	Tenex Red	400 ft.	19,000 lbs.
DNCB8P-TN10-RED-450	Tenex Red	450 ft.	19,000 lbs.

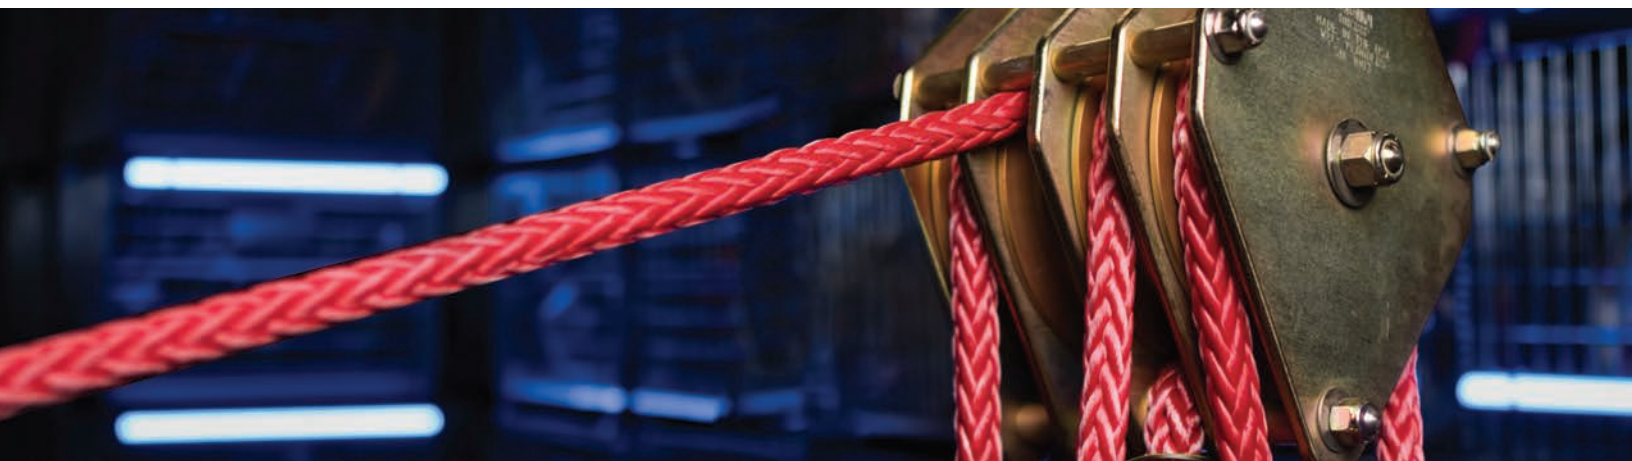

# UNIVERSAL BLOCKS



## CB-1

- Gate style: Spring loaded latch that can be operated with a hot stick
- High-strength aluminum alloy frame
- Heavy-duty sealed ball bearings featuring synthetic aviation grease
- Three mounting options: crossarm bracket, insulator bracket, or suspended using a mounting attachment




PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	FRAME OPENING	MAX CABLE DIAMETER	WLL	WEIGHT
DNCB-1	Aluminum	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	8.5 lbs.
DNCB-1DI	Ductile Iron	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	13.5 lbs.
DNCB-1LS	Urethane Lined	3"	7"	3-3/4" H x 3-1/8" W	2"	2,500 lbs.	9 lbs.



## CB-2

- Gate style: Hinged flip top, and gate is retained with a ball detent pin
- High-strength aluminum alloy frame
- Heavy-duty sealed ball bearings featuring synthetic aviation grease
- Three mounting options: crossarm bracket, insulator bracket, or suspended using a mounting attachment

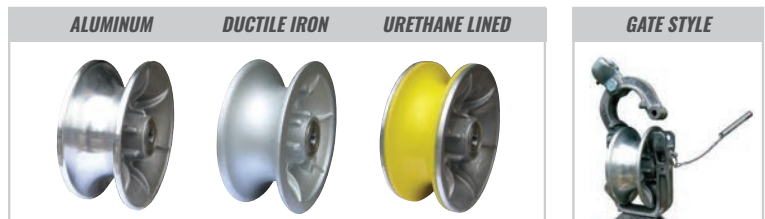


PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	FRAME OPENING	MAX CABLE DIAMETER	WLL	WEIGHT
DNCB-2	Aluminum	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	8.5 lbs.
DNCB-2DI	Ductile Iron	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	13.5 lbs.
DNCB-2LS	Urethane Lined	3"	7"	3-3/4" H x 3-1/8" W	2"	2,500 lbs.	9 lbs.




# GROUNDING UNIVERSAL BLOCKS

## CB-1G

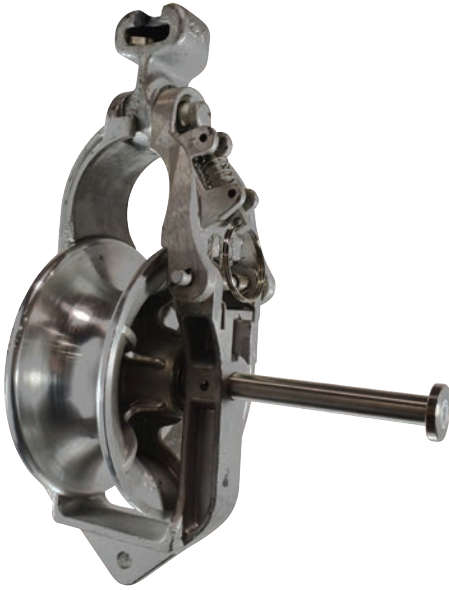

- Gate style: Spring loaded latch that can be operated with a hot stick
- Ground stud length: 5-1/8"
- High-strength aluminum alloy frame
- Heavy-duty sealed ball bearings featuring synthetic aviation grease
- Three mounting options: crossarm bracket, insulator bracket, or suspended using a mounting attachment

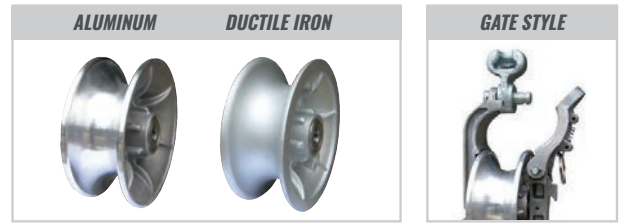


PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	FRAME OPENING	MAX CABLE DIAMETER	WLL	WEIGHT
DNCB-1GAL	Aluminum	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	9 lbs.
DNCB-1GDI	Ductile Iron	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	14 lbs.

## CB-2G



- Gate style: Hinged flip top, and gate is retained with a ball detent pin
- Ground stud length: 5-1/8"
- High-strength aluminum alloy frame
- Heavy-duty sealed ball bearings featuring synthetic aviation grease
- Three mounting options: crossarm bracket, insulator bracket, or suspended using a mounting attachment

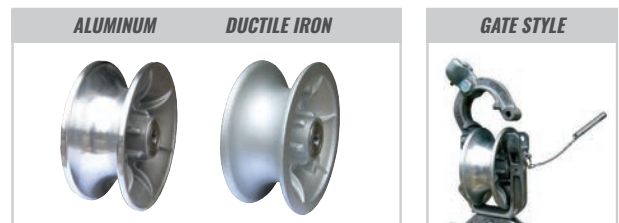

PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	FRAME OPENING	MAX CABLE DIAMETER	WLL	WEIGHT
DNCB-2GAL	Aluminum	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	9 lbs.
DNCB-2GDI	Ductile Iron	3"	7"	3-3/4" H x 3-1/8" W	2-1/4"	2,500 lbs.	14 lbs.


# UNIVERSAL HELICOPTER BLOCKS



Arm sold separately

## HB-7

- Gate style: Heavy-duty spring-loaded
- High-strength aluminum alloy frame
- Arm is retained with ball detent pins
- Arm length: 16" (*Helicopter arm is sold separately*)

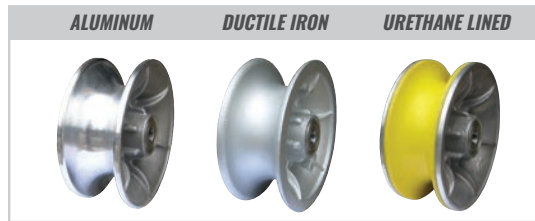

PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	ARM LENGTH	MAX CABLE DIAMETER	WLL	WEIGHT
DNHB-7AL	Aluminum	3"	7"	N/A	2-1/4"	2,500 lbs.	11.5 lbs.
DNHB-7DI	Ductile Iron	3"	7"	N/A	2-1/4"	2,500 lbs.	16.5 lbs.
DNHB-7LS	Urethane Lined	3"	7"	N/A	2"	2,500 lbs.	12 lbs.
DNHB-7ARM	Helicopter Arm Only	N/A	N/A	16"	N/A	2,500 lbs.	3 lbs.






# MOUNTING BRACKETS & ATTACHMENTS



## CROSSARM BRACKETS

- Mounts any CB-Series distribution stringing block to a crossarm
- Integrated locking pin mechanism securely locks the stringing block in place
- Quick-release hook nut
- Allows the universal stringing block to be mounted at various angles

PART #	STYLE	CROSSARM SIZE	WEIGHT
DNAB-1	Straight Ball Detent Pin	4-1/2" x 5-1/2"	5.5 lbs.
DNAB-2	L-Shaped Locking Detent Pin	4-1/2" x 5-1/2"	5.5 lbs.
DNAB-6	Straight Ball Detent Pin	6-1/4" x 7"	6 lbs.

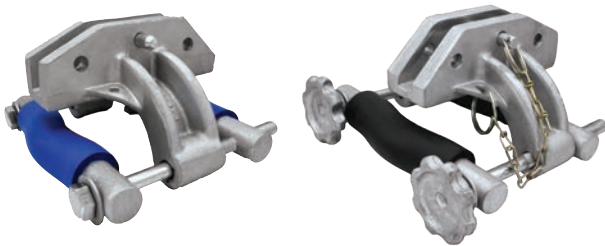

## INSULATOR BRACKETS

- Through-hole mounting bracket allows CB-Series blocks to clamp securely to a tie top insulator
- Two style options allow the user to tighten each bolt independently
- Contoured rubber coated bracket

PART #	STYLE	MAX OPENING SIZE	WEIGHT
DNIB-1	3/4" Hex Head	5"	4.1 lbs.
DNIB-1H	Hand Knob	5"	5.1 lbs.




## MOUNTING ATTACHMENTS

PART #	STYLE	DESCRIPTION	WEIGHT
DNT12	Safety Hook	Galvanized Ball Safety Hook with Spring-Loaded Latch (WLL: 2,000 lbs. For Use Only with 7" Blocks)	1 lb.
DN14	Ball Clevis	Galvanized Standard Ball Clevis with Removable Pin Pin is Retained with a Humpback Cotter Pin	1 lb.
DN14A	Ball Clevis	Zinc-Plated Standard Ball Clevis with Non-Removable Locking Pin	1 lb.
DN15	Y-Ball Clevis	Galvanized Y-Ball Clevis with Curved Retention Bolt Bolt is Retained With a Hex Nut And Humpback Cotter Pin	1.8 lbs.

PART #	REPLACEMENT PARTS
DN14-PIN	Replacement Straight Pin and Humpback Cotter Pin (For Use Only with DN14 Ball Clevis)
DN15-PIN	Replacement Curved Bolt, Nut and Humpback Cotter Pin (For Use Only with DN15 Y-Ball Clevis)
DNCP1415	Replacement Humpback Cotter Pin Only


# STRINGING BLOCKS

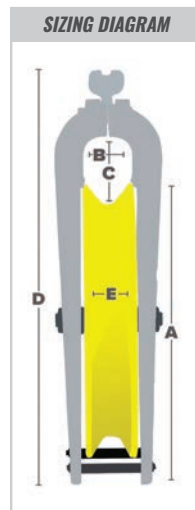

## STANDARD STRINGING BLOCKS

- Constructed of aluminum alloy, lightweight and durable
- Urethane-lined sheave
- Anti-friction bearings featuring synthetic aviation grease
- Extra lifting bars located at the top, center, and bottom of the blocks
- Large throat opening allows for the passage of most sleeves and connectors

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB12U	12"	2-1/2"	4"	21-7/8"	1-3/8"	12,000 lbs.	20 lbs.
DNSB16U	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	29.5 lbs.
DNSB22U	22"	3-1/8"	5-5/8"	31-9/16"	2"	12,000 lbs.	52 lbs.
DNSB28U	28"	3-1/4"	5-11/16"	38-3/4"	2-3/8"	12,000 lbs.	62 lbs.

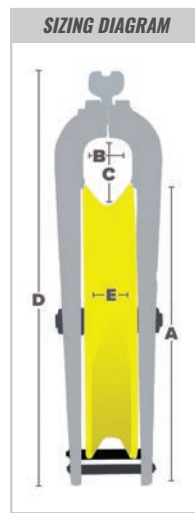


## WIDE STRINGING BLOCKS

- Wider version of the Standard Stringing Block
- Designed to improve installation of T2® and VR2® conductors
- Constructed of aluminum alloy, lightweight and durable
- "V-Groove" urethane-lined, wide-throat sheave
- Anti-friction bearings featuring synthetic aviation grease
- Extra lifting bars located at the top, center, and bottom of the blocks

PART #	A	B	C	D	E	WLL	WEIGHT
DNSBW16U	16"	4"	5-3/4"	26-3/4"	3-1/4"	12,000 lbs.	40.5 lbs.
DNSBW22U	22"	4"	5-1/2"	32-1/2"	3"	12,000 lbs.	62 lbs.
DNSBW28U	28"	4"	5-1/2"	38-3/4"	3-1/4"	12,000 lbs.	71.5 lbs.
DNSBW36U	36"	5"	6-1/2"	47-1/4"	3-5/8"	12,000 lbs.	145 lbs.
DNSBW42U	42"	5-3/8"	6-3/8"	53"	4"	12,000 lbs.	168 lbs.




# GROUNDING STRINGING BLOCKS

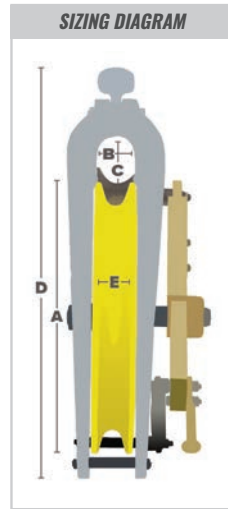

## GROUNDING STANDARD STRINGING BLOCKS

- Constructed of aluminum alloy, lightweight and durable
- Urethane-lined sheave
- Anti-friction bearings featuring synthetic aviation grease
- Gold Standard grounding attachment mounted to frame
- 4-1/2" x 3/4" Ground stud accepts virtually any ground clamp
- Dual heavy-duty springs keep the roller in constant contact with the conductor

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB12UG	12"	2-1/2"	4"	21-7/8"	1-3/8"	12,000 lbs.	30 lbs.
DNSB16UG	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	40.5 lbs.
DNSB22UG	22"	3-1/8"	5-5/8"	31-9/16"	2"	12,000 lbs.	75 lbs.
DNSB28UG	28"	3-1/4"	5-11/16"	38-3/4"	2-3/8"	12,000 lbs.	86 lbs.

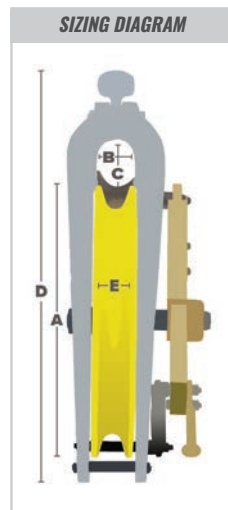


## GROUNDING WIDE STRINGING BLOCKS

- Wider version of the Standard Stringing Block
- Designed to improve installation of T2® and VR2® conductors
- Constructed of aluminum alloy, lightweight and durable
- "V-Groove" urethane-lined, wide-throat sheave
- Gold Standard grounding attachment mounted to frame
- 4-1/2" x 3/4" Ground stud accepts virtually any ground clamp
- Dual heavy-duty springs keep the roller in constant contact with the conductor

PART #	A	B	C	D	E	WLL	WEIGHT
DNSBW16UG	16"	4"	5-3/4"	26-3/4"	3-1/4"	12,000 lbs.	54 lbs.
DNSBW22UG	22"	4"	5-1/2"	32-1/2"	3"	12,000 lbs.	85 lbs.
DNSBW28UG	28"	4"	5-1/2"	38-3/4"	3-1/4"	12,000 lbs.	94.5 lbs.
DNSBW36UG	36"	5"	6-1/2"	47-1/4"	3-5/8"	12,000 lbs.	224 lbs.
DNSBW42UG	42"	5-3/8"	6-3/8"	53"	4"	12,000 lbs.	248 lbs.


# HELICOPTER BLOCKS

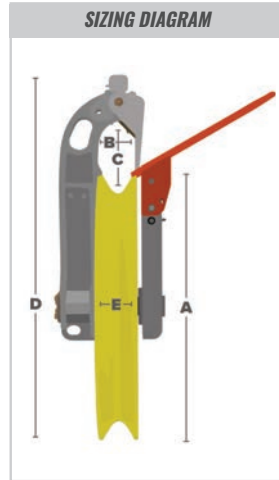

## STANDARD HELICOPTER BLOCKS

- Smooth and consistent operation
- “Snap Lock” fold-away helicopter arm
- Spring-loaded side gate
- Constructed of aluminum alloy, lightweight and durable
- Anti-friction bearings featuring synthetic aviation grease
- Urethane-lined sheave

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB16UH	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	48 lbs.
DNSB22UH	22"	3-3/8"	7-1/2"	32-1/2"	2"	12,000 lbs.	62.5 lbs.
DNSB28UH	28"	3-1/2"	7-1/2"	39"	2-3/8"	12,000 lbs.	73.5 lbs.

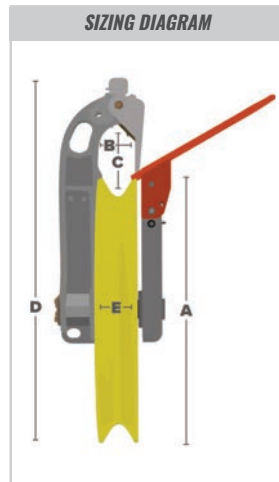


## WIDE HELICOPTER BLOCKS

- Wider version of the Standard Helicopter Block
- “Snap Lock” fold-away helicopter arm
- Designed to improve installation of T2® and VR2® conductors
- Constructed of aluminum alloy, lightweight and durable
- “V-Groove” urethane-lined, wide-throat sheave
- Anti-friction bearings featuring synthetic aviation grease

PART #	A	B	C	D	E	WLL	WEIGHT
DNSBW16UH	16"	4"	5-3/4"	26-3/4"	3-1/4"	12,000 lbs.	54 lbs.
DNSBW22UH	22"	3-3/4"	7-1/2"	32-1/2"	3"	12,000 lbs.	71.5 lbs.
DNSBW28UH	28"	4"	7-1/2"	39"	3-1/4"	12,000 lbs.	78 lbs.
DNSBW36UH	36"	5-3/8"	10-1/2"	49-1/4"	3-5/8"	12,000 lbs.	158 lbs.
DNSBW42UH	42"	5-3/8"	10-3/4"	55"	4"	12,000 lbs.	192 lbs.




# GROUNDING HELICOPTER BLOCKS

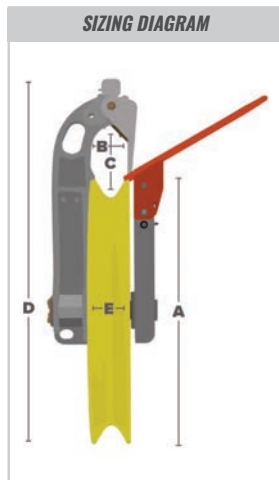

## STANDARD GROUNDING HELICOPTER BLOCKS

- Smooth and consistent operation
- “Snap Lock” fold-away helicopter arm
- Spring-loaded side gate
- Constructed of aluminum alloy, lightweight and durable
- Anti-friction bearings featuring synthetic aviation grease
- Unique industry-leading, dual-spring design

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB16UH-G	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	68 lbs.
DNSB22UH-G	22"	3-3/8"	7-1/2"	32-1/2"	2"	12,000 lbs.	82 lbs.
DNSB28UH-G	28"	3-1/2"	7-1/2"	39"	2-3/8"	12,000 lbs.	94 lbs.


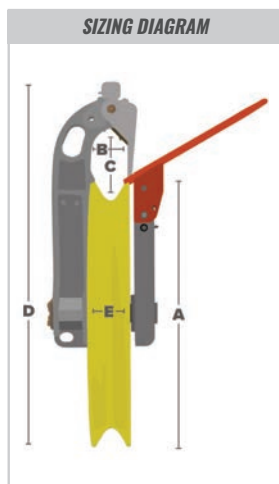


## WIDE GROUNDING HELICOPTER BLOCKS

- “Snap Lock” fold-away helicopter arm
- Designed to improve installation of T2® and VR2® conductors
- Constructed of aluminum alloy, lightweight and durable
- “V-Groove” urethane-lined, wide-throat sheave
- Anti-friction bearings featuring synthetic aviation grease
- Innovative contact roller

PART #	A	B	C	D	E	WLL	WEIGHT
DNSBW16UH-G	16"	4"	5-3/4"	26-3/4"	3-1/4"	12,000 lbs.	78 lbs.
DNSBW22UH-G	22"	3-3/4"	7-1/2"	32-1/2"	3"	12,000 lbs.	92 lbs.
DNSBW28UH-G	28"	4"	7-1/2"	39"	3-1/4"	12,000 lbs.	102 lbs.
DNSBW36UH-G	36"	5-3/8"	10-1/2"	49-1/4"	3-5/8"	12,000 lbs.	236 lbs.
DNSBW42UH-G	42"	5-3/8"	10-3/4"	55"	4"	12,000 lbs.	272 lbs.

# TANDEM BLOCKS

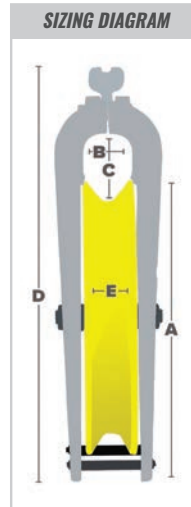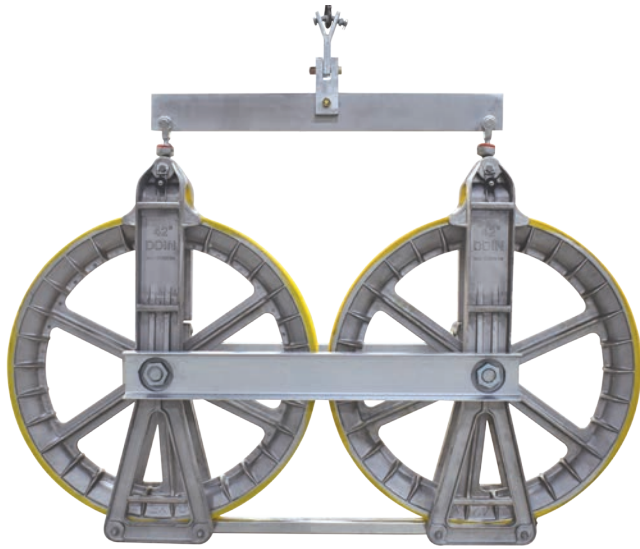

## TANDEM BLOCKS

- Large throat opening allows for the passage of most sleeves and connectors
- Anti-friction bearings featuring synthetic aviation grease
- Urethane-lined, wide-throat sheave

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB28U-T	28"	3-1/2"	7-1/2"	39"	2-3/8"	12,000 lbs.	284 lbs.
DNSBW28U-T	28"	4"	7-1/2"	39"	3-1/4"	12,000 lbs.	300 lbs.
DNSBW36U-T	36"	5"	6-1/2"	47-1/4"	3-5/8"	12,000 lbs.	470 lbs.
DNSBW42U-T	42"	5-3/8"	6-3/8"	53"	4"	12,000 lbs.	542 lbs.





# GROUNDING ATTACHMENTS



## GROUNDING ATTACHMENTS

- Attachment mounts directly to the axle of the stringing block (*Only compatible with DDIN stringing blocks*)
- Uses a heavy-duty spring assembly to keep the roller in constant contact with the conductor
- 4-1/2" x 3/4" Ground stud can accept virtually any clamp



PART #	APPLICATION	WEIGHT
DNBG12	Use with DNSB12U	10 lbs.
DNBG16	Use with DNSB16U	11 lbs.
DNBG22-28	Use with DNSB22U & DNSB28U	22 lbs.
DNBGV16	Use with DNSBW16U	13.5 lbs.
DNBGV22-28	Use with DNSBW22U & DNSBW28U	23 lbs.
DNBGV36	Use with DNSBW36U ( <i>Factory Install Only</i> )	78 lbs.
DNBGV42	Use with DNSBW42U ( <i>Factory Install Only</i> )	80 lbs.



## UNIVERSAL GROUNDING ATTACHMENT

- Mounts on any 12" to 36" stringing block with a standard ball socket
- Roller has 4 mounting locations to adjust for block size used
- Accommodates all conductor sizes
- Spring-loaded design to maintain constant contact with the conductor
- Mesh grips and swivels can pass through the roller without impacting functionality



PART #	DESCRIPTION	WIRE CAPACITY	WEIGHT
DN12-36	Fits 12" to 36" Blocks	0.198" to 2.5"	13 lbs.



# UPLIFT/HOLD DOWN BLOCKS




## UPLIFT/HOLD DOWN BLOCKS

- High-strength cast iron frame
- Holds down the pulling line or conductor in order to combat the cable from rising out of the stringing block groove
- Can be used to lower conductor for inspection or other work
- Tandem position to reduce conductor stress
- Safety Factor of 5:1

PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	MAX CABLE DIAMETER	WLL	WEIGHT
DNUL-7L	Urethane Lined	3"	7"	2"	3,500 lbs.	25.5 lbs.




DDIN LINEMAN PRODUCTS ARE MADE FROM ONLY THE BEST MATERIALS AND RIGOROUSLY TESTED TO ENSURE THEY MEET LINEMAN STANDARDS.

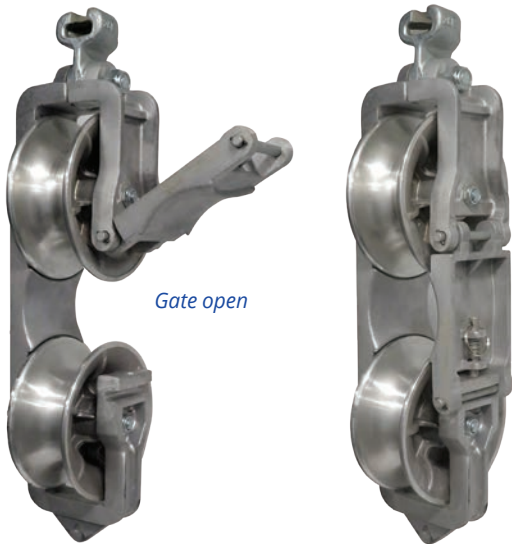


## UPLIFT BLOCK

- Used for uplift conditions
- High-strength aluminum alloy frame
- Side gate locks closed with a spring plunger
- Can be suspended or attached to a mounting bracket

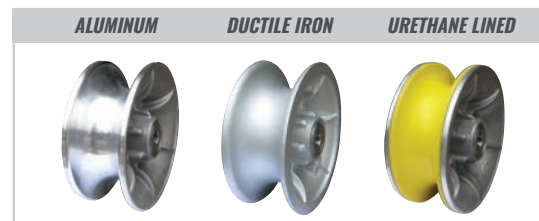


PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	MAX CABLE DIAMETER	WLL	WEIGHT
DNCB-77	Aluminum	3"	7"	2-1/4"	2,500 lbs.	15.5 lbs.
DNCB-77DI	Ductile Iron	3"	7"	2-1/4"	2,500 lbs.	25 lbs.
DNCB-77LS	Urethane Lined	3"	7"	2"	2,500 lbs.	16.5 lbs.

## 22" RADIUS BLOCKS

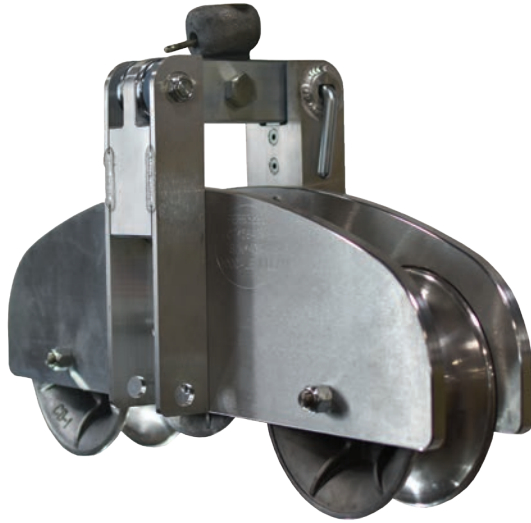


- Three rollers
- Lightweight and durable
- Used in place of full diameter stringing blocks
- Rotates freely from a vertical to a horizontal position for use on corner structures
- Sealed bearings featuring synthetic aviation grease

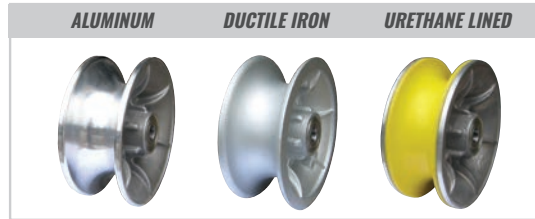


PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	MAX CABLE DIAMETER	DIMENSIONS	WLL	WEIGHT
DNRB3222-AL	Aluminum	3"	7"	2-1/4"	16" H x 23-1/2" L	4,000 lbs.	30 lbs.
DNRB3222-DI	Ductile Iron	3"	7"	2-1/4"	16" H x 23-1/2" L	4,000 lbs.	43 lbs.
DNRB3222-LS	Urethane Lined	3"	7"	2"	16" H x 23-1/2" L	4,000 lbs.	32 lbs.

## 24" RADIUS BLOCKS

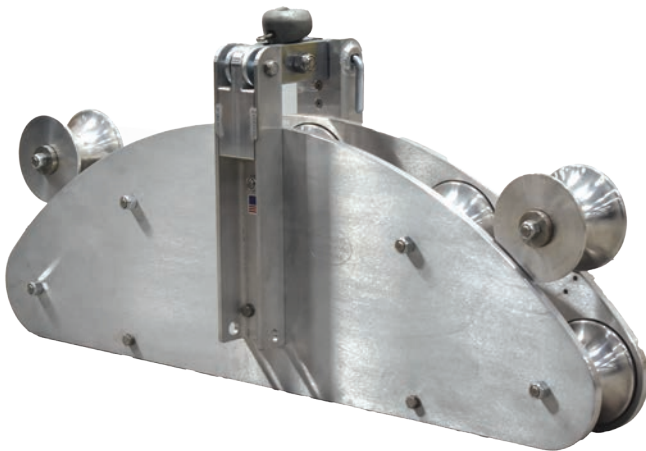

- Five rollers
- Lightweight and durable
- Used in place of full diameter stringing blocks
- Rotates freely from a vertical to a horizontal position for use on corner structures
- Sealed bearings featuring synthetic aviation grease

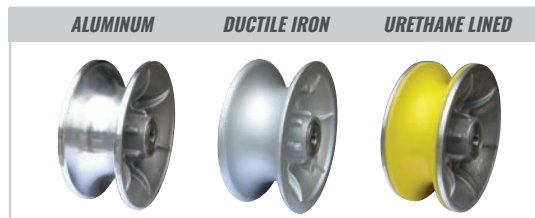

PART #	SHEAVE MATERIAL	SHEAVE WIDTH	SHEAVE DIAMETER	MAX CABLE DIAMETER	DIMENSIONS	WLL	WEIGHT
DNRB5324-AL	Aluminum	3-1/2"	5"	2-3/4"	19" H x 40" L	4,000 lbs.	72 lbs.
DNRB5324-DI	Ductile Iron	3-1/2"	5"	2-3/4"	19" H x 40" L	4,000 lbs.	88 lbs.
DNRB5324-LS	Urethane Lined	3-1/2"	5"	2-1/2"	19" H x 40" L	4,000 lbs.	74 lbs.

# TRAVELING GROUNDS



DNTG250-1625



DNTG75-2HDS

## STANDARD TRAVELING GROUNDS

- Reversible ground stud accommodates most ground clamps
- Adjustable spring-loaded center roller maintains constant pressure on the conductor



PART #	APPLICATION	ROLLER	ROLLER SIZE	CABLE CAPACITY	WEIGHT
DNTG250-1625	Distribution	Aluminum	2-1/4"	1/4" to 1-5/8"	4.8 lbs.
DNTG250-1625S	Distribution	Steel	2-1/4"	1/4" to 1-5/8"	7.8 lbs.
DNTG75-2HD	Transmission	Aluminum	3"	3/4" to 2"	10.5 lbs.
DNTG75-2HDS	Transmission	Steel	3"	3/4" to 2"	16.3 lbs.




DNTG80

## T2<sup>®</sup> / VR2<sup>®</sup> TRAVELING GROUNDS

- Engineered specifically for T2<sup>®</sup> wire
- Reversible ground stud accommodates most ground clamps
- Adjustable spring-loaded center roller maintains constant pressure on the conductor



PART #	APPLICATION	ROLLER	ROLLER SIZE	CABLE CAPACITY	WEIGHT
DNTG550	T2 <sup>®</sup> /V2 <sup>®</sup>	Aluminum	5-1/2"	T2 <sup>®</sup> 4/0 - 556	62 lbs.
DNTG80	T2 <sup>®</sup> /V2 <sup>®</sup>	Aluminum	8"	T2 <sup>®</sup> 795 - 1113	92 lbs.

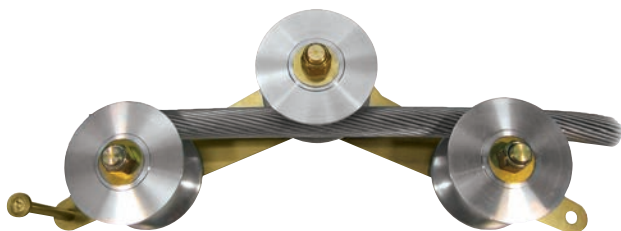

## TORSION SPRING TRAVELING GROUNDS

- Torsion spring permits passage of splices and swivels
- Two positions of adjustment to set ideal tension on the conductor
- Sealed bearings featuring synthetic aviation grease



PART #	APPLICATION	ROLLER	ROLLER SIZE	CABLE CAPACITY	WEIGHT
DN353	Transmission	Aluminum	5"	1.040" (795) - 2-1/2"	18 lbs.
DN353-SR	Transmission	Steel	5"	1.040" (795) - 2-1/2"	19 lbs.





WLL 12,000  
DATE 9/14/11  
PROOF TESTED  
000011

20mm

ODIN

ODIN WIRE ROPE

DESIGN FACTOR

# SAGGING EQUIPMENT



## SAGOMETER

- Helps to determine the temperature of the conductor being sagged
- Encased in a section of aluminum conductor
- Calibrated and certified
- Includes a padded, high-impact storage case



PART #	TEMPERATURE RANGE	WEIGHT
DNCT40-160	-40° F to 160° F	1 lb.



## SAG SCOPE

- Leveling feature for vertical and horizontal accuracy
- Mounts to wooden poles or steel structures
- 3 x 9 Power scope with cross-hairs
- Includes a padded, high-impact storage case



PART #	DESCRIPTION	WEIGHT
DN724	3 x 9 Power Scope with Cross-Hairs	26.3 lbs.



## SAGWATCH

- Simply and accurately determines sag
- Water and shock resistant
- Three scales
- Anti-magnetic

PART #	SCALE	CAPACITY	GRADUATIONS	WEIGHT
DNSW-E	3rd Return	Sag up to 36'	Feet & Decimals	0.5 lb.
N/A	5th Return	Sag up to 100'	Feet & Decimals	N/A
N/A	Seconds	Seconds up to 30	Tenth of a Second	N/A



## CLIPPING HOOKS

- High-strength aluminum alloy casting
- Available in standard, medium and heavy-duty
- Tamper-resistant galvanized shackle
- Urethane-lined hooks
- Safety factor of 5:1




PART #	DESCRIPTION	A	B	C	WLL	WEIGHT
DNS22-771	Standard	14.5"	6.25"	1.762"	6,500 lbs.	7.8 lbs.
DNS22-771MD	Medium-Duty	16"	7"	2.5"	8,000 lbs.	11.7 lbs.
DNS22-771HD	Heavy-Duty	17"	8"	3"	12,000 lbs.	19.5 lbs.



## VERTICAL BUNDLE CLIPPING HOOK

- High-strength aluminum alloy casting
- Hook frame machined out of Gold Standard aircraft-grade aluminum
- Urethane-lined hooks
- Conductor spacing: 18"

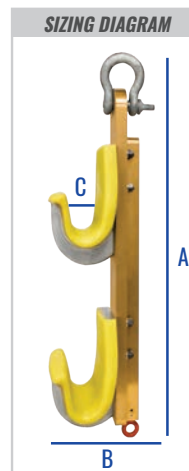

PART #	DESCRIPTION	A	B	C	WLL	WEIGHT
DNVBCH-18	Standard	27"	6"	1.762"	6,250 lbs.	19.3 lbs.





# RIGGING & HANDLINE BLOCKS



## RIGGING BLOCK

- Made with Gold Standard aircraft-grade aluminum
- Double-raced bearings featuring synthetic aviation grease
- Precision-machined components reduce side-to-side play
- Safety factor of 5:1



PART #	SHEAVE DIAMETER	ROPE CAPACITY	WLL	WEIGHT
DNRB-6	6"	1"	5,000 lbs.	18 lbs.



## 3" GOLD STANDARD ALUMINUM HANDLINE BLOCK

- Made with Gold Standard aircraft-grade aluminum
- Heavy-duty 360° rotation mount
- Anodized finish aids corrosion resistance
- Swing gate for easy one handed operation
- Safety factor of 5:1



PART #	SHEAVE DIAMETER	ROPE CAPACITY	WLL	WEIGHT
DNGSHB-3	3"	5/8"	1,500 lbs.	3.5 lbs.





## NYLON HANDLINE BLOCK

- Nylon body
- Open head design retained with thumb screw
- Shielded bearings featuring synthetic aviation grease
- Safety factor of 5:1

PART #	SHEAVE DIAMETER	ROPE CAPACITY	WLL	WEIGHT
DNNHB-3	3"	5/8"	1,000 lbs.	1.7 lbs.
DNNHB-3-LBA	Replacement Gate Screw and Lanyard Only		N/A	N/A



## ALUMINUM HANDLINE BLOCK

- Aluminum body
- Open head design retained with ball detent pin
- Shielded bearings featuring synthetic aviation grease
- Safety factor of 5:1

PART #	SHEAVE DIAMETER	ROPE CAPACITY	WLL	WEIGHT
DNAHB-3	3"	5/8"	1,000 lbs.	2.4 lbs.
DNAHB-310	Replacement Detent Pin and Ring Only		N/A	N/A



## TOWER BLOCK

- Aluminum body
- Open head design retained with ball detent pin
- Proof tested and date stamped
- Shielded bearings featuring synthetic aviation grease
- Safety factor of 5:1

PART #	SHEAVE DIAMETER	ROPE CAPACITY	WLL	WEIGHT
DNAHB-4	4"	7/8"	2,500 lbs.	6.7 lbs.
DNAHB-410	Replacement Detent Pin and Ring Only		N/A	N/A

# HANDLINE HOOKS & LIFTERS



## RATED ALUMINUM HANDLINE HOOKS

- Made from high-strength aluminum alloy
- Available with or without a latch
- Safety factor of 5:1



PART #	DESCRIPTION	DIMENSIONS	WLL	WEIGHT
DNHLH5	No latch	7" H x 4" W x 1/2" D	1,000 lbs.	0.5 lb.
DNHLH5L	Latch	7" H x 4" W x 1/2" D	1,000 lbs.	0.5 lb.



## STANDARD HANDLINE HOOKS

- Available in bronze or steel



PART #	DESCRIPTION	DIMENSIONS	WEIGHT
DNHLH2	Bronze	5-1/2" H x 3-1/8" W x 1/4" D	0.5 lb.
DNT258	Steel	6-3/4" H x 3-7/8" W x 7/16" D	0.5 lb.



## REEL LIFTERS

- Stainless steel axles to resist harsh environments
- Powder coated finish resists chipping, cracking and fading
- Rugged material finishes to protect against corrosion
- High-performance machined components for consistent performance
- Improved lever action to ensure a clean release every time
- Meets ASME B.30.20.1



PART #	ARBOR HOLE	DIMENSIONS	WLL	WEIGHT
DNRL20	2" to 4"	16" H x 4" W x 2" D	3,000 lbs.	5.9 lbs.
DNRL40	3" to 6"	21" H x 4-1/2" W x 2-1/2" D	5,000 lbs.	13 lbs.

PART #	REPLACEMENT PARTS
DNRL20-3010RP	DNRL20 Spring Assembly
DNRL20-3020RP	DNRL20 Pivot Axle Assembly
DNRL20-3030RP	DNRL20 Slide Axle Assembly

PART #	REPLACEMENT PARTS
DNRL40-3010RP	DNRL40 Spring Assembly
DNRL40-3020RP	DNRL40 Pivot Axle Assembly
DNRL40-3030RP	DNRL40 Slide Axle Assembly



# TRANSFORMER SLINGS




## ADJUSTABLE OVERHEAD TRANSFORMER SLINGS

- Adjustable eyes from 3" to 15"
- Proof tested
- Serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNTS12	1/2"	Adjustable 24" to 48"	Blue	1,225 lbs.	1 lb.
DNTS58	5/8"	Adjustable 24" to 48"	Red	2,160 lbs.	1.6 lbs.
DNTS34	3/4"	Adjustable 24" to 48"	Green	3,200 lbs.	2 lbs.

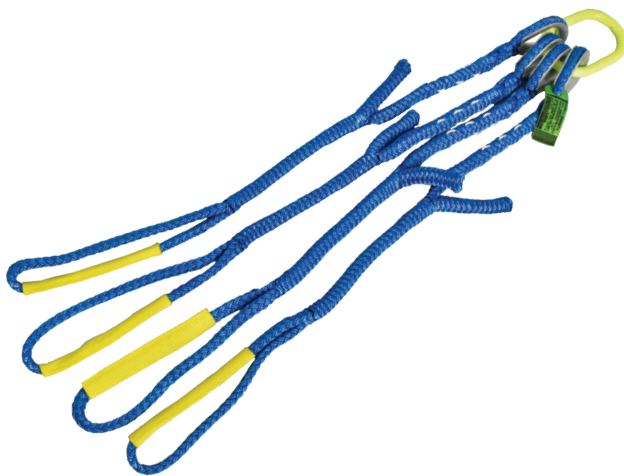

## CAPACITOR BANK SLING

- Four adjustable legs provide easy balancing and level lifting of capacitor bank
- Legs are individually connected to the oblong link
- Proof tested
- Serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNTS12CB-4-ADJ	4	1/2"	Adjustable 34" to 44"	Blue	5,000 lbs.	6.8 lbs.


### TRANSFORMER SLING TAGS

Every DDIN Transformer Sling is tagged and serialized for tracking within the field. Each tag includes:

- Part number
- Rope diameter
- WLL
- Safe handling instructions
- Test date



# TRANSFORMER SLINGS

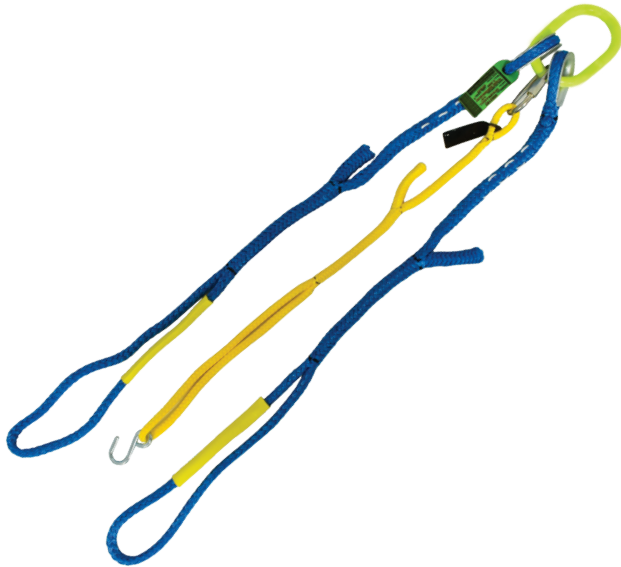


## SINGLE PHASE PADMOUNT TRANSFORMER SLINGS

- Designed for safe and easy handling of single phase padmount transformers
- Center leg designed for suspending the transformer lid
- Available with adjustable or fixed-length legs
- Proof tested, serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	CENTER LEG LENGTH	WLL	WEIGHT
DNTS12PM-2-LL	2	1/2"	Fixed 48"	Blue	24" to 36"	2,500 lbs.	5 lbs.
DNTS12PM-2-ADJ-LL	2	1/2"	Adjustable 36" to 48"	Blue	24" to 36"	2,500 lbs.	5 lbs.
DNTS12PM-4-LL	4	1/2"	Fixed 48"	Blue	24" to 36"	2,500 lbs.	8 lbs.
DNTS12PM-4-ADJ-LL	4	1/2"	Adjustable 36" to 48"	Blue	24" to 36"	2,500 lbs.	8 lbs.

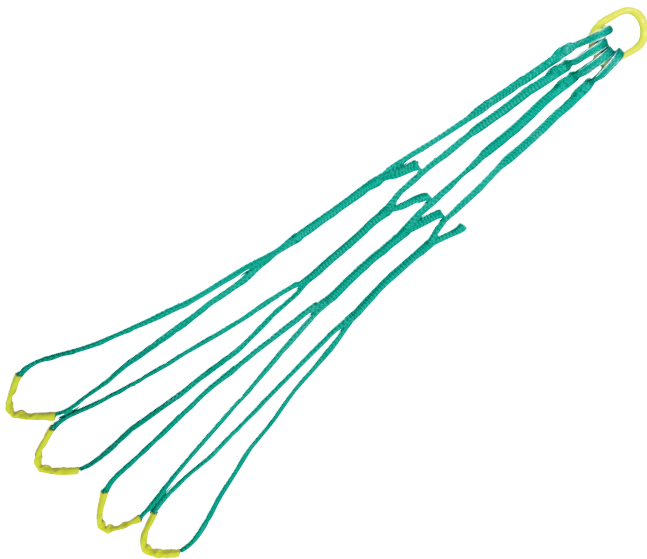


## THREE PHASE PADMOUNT TRANSFORMER SLINGS

- Designed for safe and easy handling of three phase padmount transformers
- Available with adjustable or fixed-length legs
- Legs individually connected to oblong link
- Proof tested, serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNTS58PM-4	4	5/8"	Fixed 72"	Red	12,000 lbs.	16 lbs.
DNTS58PM-4-ADJ	4	5/8"	Adjustable 60" to 96"	Red	9,900 lbs.	17 lbs.
DNTS34PM-4	4	3/4"	Fixed 72"	Green	15,200 lbs.	22 lbs.
DNTS34PM-4-ADJ	4	3/4"	Adjustable 60" to 96"	Green	13,400 lbs.	23 lbs.

# HEAVY-DUTY & LIFT SLINGS

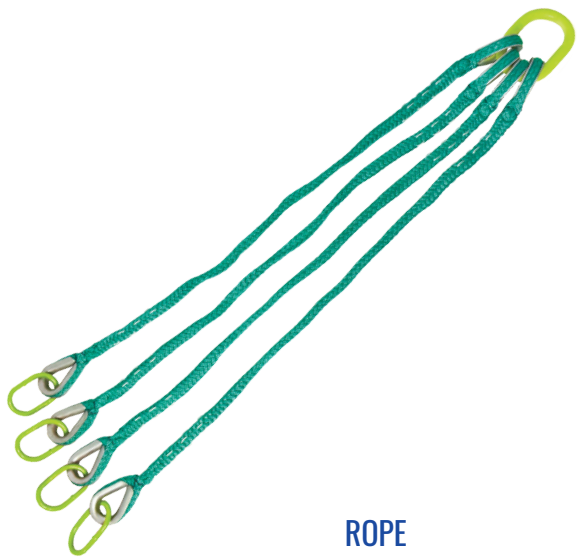

## HEAVY-DUTY THREE PHASE PADMOUNT TRANSFORMER SLINGS

- Legs assembled with thimbles in each eye and additional connecting links on the lower eyes
- Legs individually connected to the oblong link
- Proof tested, serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNTS34PM-4-HD	4	3/4"	Fixed 66"	Green	15,700 lbs.	26 lbs.



## SUPER-DUTY THREE PHASE PADMOUNT TRANSFORMER SLINGS

- Legs assembled with thimbles in each eye and additional connecting links on the lower eyes
- Legs individually connected to the oblong link
- Proof tested, serialized and tagged
- Includes durable mesh storage bag
- Safety factor of 5:1



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNTS78PM-4-HD	4	7/8"	Fixed 88"	Black	20,000 lbs.	37 lbs.



## REEL LIFT SLING


- Wear pads on each leg for increased rope protection
- Designed for easy movement of reels
- Proof tested, serialized and tagged



PART #	LEGS	ROPE DIAMETER	LIFTING LEG LENGTH	COLOR	WLL	WEIGHT
DNRL34-2	2	3/4"	Fixed 72"	Green	7,000 lbs. at 60°	25.5 lbs.



# POLE PULLING & SETTING

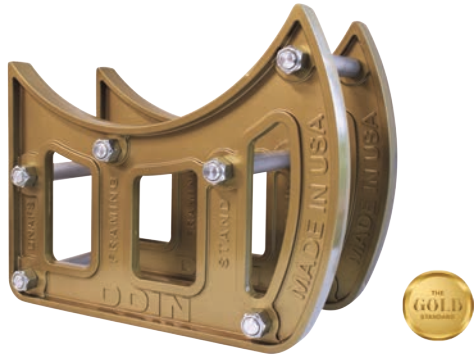

## ALUMINUM FRAMING STAND

- Can be used in conjunction with a cant hook



PART #	HEIGHT	WIDTH	LENGTH	WEIGHT
DNAFS	18"	9"	15"	24.5 lbs.



## PULLING EYE

- Safety factor of 5:1

PART #	FITS ANCHOR ROD SIZE	WLL	WEIGHT
DNPE-1	Adjustable 1/2" to 1"	6,000 lbs.	5 lbs.
DNPE-1BN	Replacement Bolt & Nut	N/A	0.1 lb.
DNPE-1W	Replacement Wedge	N/A	0.1 lb.



## HEAVY-DUTY PULLING EYES

- Safety factor of 5:1



PART #	FITS ANCHOR ROD SIZE	WLL	WEIGHT
DNHDPE-1000	1"	15,000 lbs.	10.8 lbs.
DNHDPE-1250	1-1/4"	15,000 lbs.	12 lbs.
DNHDPE-1500	1-1/2"	15,000 lbs.	12 lbs.
DNHDPE-1750	1-3/4"	15,000 lbs.	12.8 lbs.
DNHDPE-2000	2"	15,000 lbs.	18.8 lbs.
DNHDPE-2250	2-1/4"	15,000 lbs.	19.8 lbs.

# POLE PULLING & SETTING



## TRANSMISSION POLE CANT HOOK

- Lightweight aluminum head
- Textured, non-skid rubber V-face
- Equipped with a 30' nylon strap
- Ability to swap out fiberglass or aluminum\* handle with same cant hook head

\*Handle colors may vary



PART #	HANDLE MATERIAL	HANDLE DIAMETER	LENGTH	WEIGHT
DNTPCH	Aluminum	1-1/4"	75"	30 lbs.
DNTPCH-F	Fiberglass	1-1/4"	75"	25 lbs.
DNTPCH-145-RP	Aluminum Handle Only	1-1/4"	72"	9.5 lbs.
DNTPCH-210-RP	Fiberglass Handle Only	1-1/4"	72"	6.1 lbs.



## MUD BUCKET

- Removes mud, gravel or other debris from deep holes
- Bucket is made from 11-gauge cold rolled steel
- Bucket holds up to 1 gallon
- Replacement handles sold individually



PART #	HANDLE MATERIAL	HANDLE DIAMETER	LENGTH	WEIGHT
DN683-H	Fiberglass	1-1/4"	90" to 158"	13.8 lbs.
DN683-200	Fiberglass Handle Only	1-1/4"	76" to 144"	3.6 lbs.



# GROUND CLAMPS & FERRULES



## GROUND CLAMPS

- Smooth jaw
- Exclusive "Rapid Advance" eye screw technology which allows the jaw to close in half the turns compared to standard clamps
- Stainless steel hex head strain relief bolts
- Accepts standard 5/8-11 UNC threaded ferrules

PART #	MATERIAL	CLAMP CAPACITY	CONTINUOUS	FAULT CURRENT 15 CYCLES	WEIGHT
DNWC5	Aluminum	0.128" to 1.250"	400 Amps	5H/47,000 Amps	1.7 lbs.
DNWC6	Aluminum	0.162" to 2.00"	400 Amps	5H/47,000 Amps	1.9 lbs.



DN20UTA



DN40T

## THREADED FERRULES

- Each ferrule is tin-plated copper
- Four cable sizes available

PART #	CABLE SIZE	DESCRIPTION	WEIGHT
DN02UTA	#2	Grounding Ferrule with Undercut	0.3 lb.
DN10UTA	1/0	Grounding Ferrule with Undercut	0.3 lb.
DN20UTA	2/0	Grounding Ferrule with Undercut	0.3 lb.
DN40UTA	4/0	Grounding Ferrule with Undercut	0.3 lb.
DN02T	#2	Jumper Ferrule	0.3 lb.
DN10T	1/0	Jumper Ferrule	0.3 lb.
DN20T	2/0	Jumper Ferrule	0.3 lb.
DN40T	4/0	Jumper Ferrule	0.3 lb.





# GROUNDING ACCESSORIES



## GROUND FLAGS

- Two reflective strips on the front and back
- Hook and loop strap attachment with grommet hole
- PVC rods at the top and bottom of the flag for rigidity
- Wind-resistant style offers 18 wind slits and a 2" wide hook and loop strap



PART #	DESCRIPTION	COLOR	STRAP WIDTH	WEIGHT
DNGF1618	Standard	Hi-Visibility Orange	1"	0.5 lb.
DNGF1618-LG	Standard	Hi-Visibility Green	1"	0.5 lb.
DNGF1618-W	Wind Resistant	Hi-Visibility Orange	2"	0.5 lb.



## GROUND ROD DRIVER

- Hammer action
- Double-D shaped urethane washer prevents sliding rod from exiting during operation



PART #	LENGTH	WEIGHT
DNMGRD-2	33"	24 lbs.



## SCREW GROUND ROD

- Temporary ground rod
- Bronze cast auger and T-Handle
- 5/8" Copper clad rod



PART #	LENGTH	WEIGHT
DNTGR	72"	7.3 lbs.



## T-HANDLE ADAPTER

- Converts the shotgun eye of a ground clamp into a T-handle
- Made from aluminum alloy
- Knurled surface finish for added grip



PART #	DESCRIPTION	WEIGHT
DNGCTH	Two Piece Screw-Together Design	0.3 lb.

# ADAPTERS & SOCKETS



## IMPACT ADAPTERS

- Made to withstand the increased torque output of utility impact wrenches
- Available as a pack of 3 adapters or individual
- Black adapters can be used as replacements for Flip Sockets DNFS-1 and DNFS-2



**WATCH OUR IMPACT ADAPTERS  
TACKLE THE TOP COMPETITORS!**



PART #	DESCRIPTION	COLOR	LENGTH	WEIGHT
DNIA-3PK	Pack Including DNIA, DNIA1412, and DNIA1438	N/A	N/A	0.5 lb.
DNIA	7/16" Hex to 1/2" Square	Red	2-3/4"	0.3 lb.
DNIA1412	1/4" Hex to 1/2" Square	Yellow	2"	0.1 lb.
DNIA1438	1/4" Hex to 3/8" Square	Green	1-7/8"	0.5 lb.
DNIA-1	7/16" Hex to 3/4" Square	Black	3-1/8"	0.4 lb.
DNIA-2	7/16" Hex to 1" Square	Black	3-1/4"	0.4 lb.



**DDIN IS COMMITTED TO CREATING THE TOUGHEST TOOLS POSSIBLE TO WITHSTAND THE WEAR AND TEAR OF REAL-WORLD USE.**




## FLIP SOCKETS

- Deep sockets with openings on both ends
- 3-way and 4-way deep sockets
- Each flip socket includes corresponding adapter




PART #	DESCRIPTION	APPLICATION	LENGTH	WEIGHT
DNFS-1	4-Way Flip Socket with DNIA-1 Adapter <i>(Side 1 accepts 3/4" and 13/16" square nuts // Side 2 accepts 1" and 1-1/8" square nuts)</i>	Distribution	7-3/4"	2 lbs.
DNFS-2	3-Way Flip Socket with DNIA-2 Adapter <i>(Side 1 accepts 1-1/8" square nuts // Side 2 accepts 1-5/16" and 1-1/2" square nuts)</i>	Transmission	8-5/8"	3.5 lbs.

## STEEL WIRE BASKETS

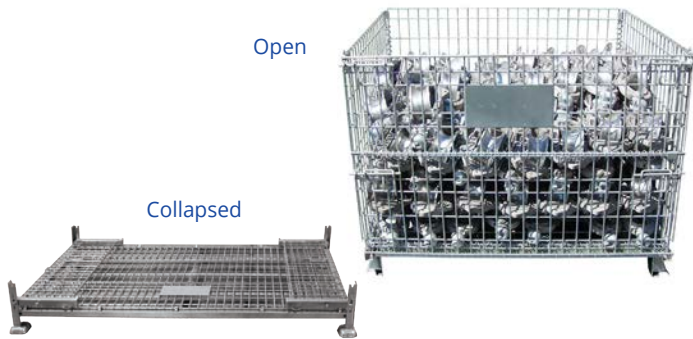

- Zinc-plated steel
- Steel plate on gate allows for labeling basket contents
- Stackable with a hinged gate for easy access to contents
- Collapsible

PART #	STANDARD STORAGE USES	DIMENSIONS	WEIGHT (EMPTY)
DNS3.5-E	(100) Crossarm Brackets	20" H x 47" W x 40" D	100 lbs.
DNS7-E	(100) 7" Stringing Blocks, (20) 16" Stringing Blocks, (10) 22" Stringing Blocks, (200) Crossarm Brackets	36" H x 47" W x 40" D	130 lbs.
DNS10-E	(25) 5' Extension Arms, (10) 28" Stringing Blocks	41" H x 67" W x 44" D	178 lbs.
DNS11-E	(25) 6' Extension Arms	36" H x 79" W x 43" D	215 lbs.
DNS12-E	(3) 42" Stringing Blocks, (5) 36" Stringing Blocks	49" H x 61" W x 39" D	168 lbs.



## POLYMER END CAP HOOK

- Screws onto the end of a standard 2x4 (Cut to desired length)
- Neatly store hot arms in a DNS10 or DNS11 wire basket
- Sold separately or assembled to fit DDIN wire baskets
- Four needed for a basket carrying 25 hot arms

PART #	DESCRIPTION	SIZE	WEIGHT
DN2X4PECH	End Cap Hook Only	7-3/4"	.65 lb.
DN2X4SUPPORT	Assembly	52"	4 lbs.



## MESH STORAGE BAGS

- High quality mesh material allows for ventilation and visibility of bag contents

PART #	DESCRIPTION	SIZE	WEIGHT
DNMB-0610	XS	6" W x 10" L	0.4 lb.
DNMB-0618	S	6" W x 18" L	0.5 lb.
DNMB-1019	M	10" W x 19" L	0.65 lb.
DNMB-1230	L	12" W x 30" L	0.75 lb.





# PRE-SPLICE CUTTERS



DNPSC-1 DNPSC-1HD DNPSC-2HD DNPSC-3HD DNPSC-4HD

## PRE-SPLICE CUTTERS

- Quickly and accurately removes the aluminum stranding around the steel core of conductor, including ACSR & ACSS
- Made of aluminum alloy
- Sold as a kit



PART #	DESCRIPTION	BUSHING STYLE	KIT INCLUDES	TOOL WEIGHT
DNPSC-1	Conductor Trimmer	TE	<ul style="list-style-type: none"> <li>• Tool</li> <li>• Standard Bushing Holder</li> <li>• Replacement Cutting Wheel</li> <li>• Storage Case (Holds 11 bushings)</li> </ul>	1.7 lbs.
DNPSC-1HD	Heavy-Duty Conductor Trimmer	TE	<ul style="list-style-type: none"> <li>• Tool</li> <li>• Blue Bushing Holder</li> <li>• Replacement Cutting Wheel &amp; Axle</li> <li>• Storage Case (Holds 6 bushings)</li> </ul>	2.5 lbs.
DNPSC-2HD	Large Diameter Heavy-Duty Conductor Trimmer	TD	<ul style="list-style-type: none"> <li>• Tool</li> <li>• Two Replacement Cutting Wheels &amp; Axles</li> <li>• Storage Case (Holds 6 bushings)</li> </ul>	2.5 lbs.
DNPSC-3HD	Large Diameter Heavy-Duty Conductor Trimmer	TC	<ul style="list-style-type: none"> <li>• Tool</li> <li>• Two Replacement Cutting Wheels &amp; Axles</li> <li>• Storage Case (Holds 6 bushings)</li> </ul>	2.5 lbs.
DNPSC-4HD	Large Diameter Heavy-Duty Conductor Trimmer	TB	<ul style="list-style-type: none"> <li>• Tool</li> <li>• Storage Case</li> </ul>	2.5 lbs.
DN54160	Bushing Holder Only	N/A	N/A	0.5 lb.
DN54270	PSC-1 & PSC-1HD Cutting Wheel Only	N/A	N/A	N/A
DN54170	PSC-2 Cutting Wheel Only	N/A	N/A	N/A



# TE STYLE BUSHINGS



Each DDIN Bushing is precision machined to work with a specific wire size.

Used to remove aluminum stranding while leaving the steel core stranding untouched.

PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
TE5755	4	7/1	Swanate	ACSR	DNPSC-1 / DNPSC-1HD
TE5759	1	6/1	Robin	ACSR	DNPSC-1 / DNPSC-1HD
TE5761	2/0	6/1	Quail	ACSR	DNPSC-1 / DNPSC-1HD
TE5762	3/0	6/1	Pigeon	ACSR	DNPSC-1 / DNPSC-1HD
TE5763	4/0	6/1	Penguin	ACSR	DNPSC-1 / DNPSC-1HD
TE5764	266.8	18/1	Waxwing	ACSR	DNPSC-1 / DNPSC-1HD
TE5766	266.8	26/7	Partridge	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5767	300	26/7	Ostrich	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5768	336.4	18/1	Merlin	ACSR	DNPSC-1 / DNPSC-1HD
TE5769	336.4	26/7	Linnet	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5770	336.4	30/7	Oriole	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5771	397.5	18/1	Chickadee	ACSR	DNPSC-1 / DNPSC-1HD
TE5772	397.5	24/7	Brant	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5773	397.5	26/7	Ibis	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5774	397.5	30/7	Lark	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5775	477	18/1	Pelican	ACSR	DNPSC-1 / DNPSC-1HD
TE5776	477	24/7	Flicker	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5777	477	26/7	Hawk	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5778	477	30/7	Hen	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5779	556.5	18/1	Osprey	ACSR	DNPSC-1 / DNPSC-1HD
TE5780	556.5	24/7	Parakeet	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5781	556.5	26/7	Dove	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5782	556.5	30/7	Eagle	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5784	605	26/7	Squab	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5785	605	30/19	Teal	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5786	636	36/1	Swift	ACSR	DNPSC-1 / DNPSC-1HD
TE5787	636	18/1	Kingbird	ACSR	DNPSC-1 / DNPSC-1HD

# TE STYLE BUSHINGS

Each DDIN Bushing is precision machined to work with a specific wire size.

Used to remove aluminum stranding while leaving the steel core stranding untouched.



PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
TE5788	636	24/7	Rook	ACSR	DNPSC-1 / DNPSC-1HD
TE5789	636	26/7	Grosbeak	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5790	636	30/19	Egret	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5791	653.9	18/3	N/A	ACSR	DNPSC-1 / DNPSC-1HD
TE5792	666.6	24/7	Flamingo	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5793	715.5	24/7	Stilt	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5794	715.5	26/7	Starling	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5795	715.5	30/19	Redwing	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5796	795	36/1	Coot	ACSR	DNPSC-1 / DNPSC-1HD
TE5797	795	45/7	Tern	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5799	795	54/7	Condor	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5800	795	26/7	Drake	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5801	795	30/19	Mallard	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5802	900	45/7	Ruddy	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5803	900	54/7	Canary	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5804	954	36/1	Catbird	ACSR	DNPSC-1 / DNPSC-1HD
TE5805	954	45/7	Rail	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5806	954	54/7	Cardinal	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5808	1033.5	45/7	Ortolan	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5809	1033.5	54/7	Curlew	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5810	1113	45/7	Bluejay	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5811	1113	54/19	Finch	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5812	1192.5	45/7	Bunting	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5813	1192.5	54/19	Grackle	ACSR	DNPSC-1 / DNPSC-1HD
TE5814	1272	45/7	Bittern	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5815	1272	54/19	Pheasant	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5816	1351.5	45/7	Dipper	ACSR/ACSS	DNPSC-1 / DNPSC-1HD



# TE STYLE BUSHINGS



PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
TE5817	1351.5	54/19	Martin	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5818	1431	45/7	Bobolink	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5819	1431	54/19	Plover	ACSS	DNPSC-1 / DNPSC-1HD
TE5820	1510	45/7	Nuthatch	ACSS	DNPSC-1 / DNPSC-1HD
TE5821	1510	54/19	Parrot	ACSS	DNPSC-1 / DNPSC-1HD
TE5822	1590	45/7	Lapwing	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5823	1590	48/7	Hornbill	ACSR-AW	DNPSC-1 / DNPSC-1HD
TE5824	1780	84/19	Chukar	ACSR/ACSS	DNPSC-1 / DNPSC-1HD
TE5825	80	8/1	Grouse	ACSR	DNPSC-1 / DNPSC-1HD
TE5826	101.8	12/7	Petrel	ACSR	DNPSC-1 / DNPSC-1HD
TE5827	110.8	12/7	Minorca	ACSR	DNPSC-1 / DNPSC-1HD
TE5828	134.6	12/7	Leghorn	ACSR	DNPSC-1 / DNPSC-1HD
TE5829	159	12/7	Guinea	ACSR	DNPSC-1 / DNPSC-1HD
TE5830	176.9	12/7	Dotterel	ACSR	DNPSC-1 / DNPSC-1HD
TE5831	190.8	12/7	Dorking	ACSR	DNPSC-1 / DNPSC-1HD
TE5832	211.3	12/7	Cochin	ACSR	DNPSC-1 / DNPSC-1HD
TE5842	605	24/7	Peacock	ACSR/ACSS	DNPSC-1 / DNPSC-1HD

# TE STYLE BUSHINGS

Each DDIN Bushing is precision machined to work with a specific wire size.

Used to remove aluminum stranding while leaving the steel core stranding untouched.



PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
TE6203	477	18/7	Hawk	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6204	556.5	18/7	Parakeet	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6205	556.5	20/7	Dove	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6208	636	20/7	Grosbeak	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6212	795	20/7	Drake	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6215	954	20/7	Cardinal	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6218	1033.5	20/7	Curlew	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6224	1192.5	39/19	Grackle	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6227	1272	39/19	Pheasant	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6229	1351	42/19	Martin	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6230	1431	36/7	Bobolink	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6233	1590	42/19	Falcon	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6234	1780	37/19	Chukar	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6235	2156	64/19	Bluebird	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6237	571.7	18/7	Mohawk	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6238	565.3	18/7	Calumet	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6240	664.8	20/7	Oswego	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6242	768.2	20/7	Maumee	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6243	762.8	20/7	Wabash	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6245	946.7	35/7	Fraser	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6247	959.6	22/7	Suwannee	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6249	1158	33/7	Genesee	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6250	1158.4	26/7	Hudson	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6253	1233.6	38/19	Yukon	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6261	1557.4	36/7	Potomac	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6262	1533.3	39/19	Rio Grande	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6264	1622	39/19	Pecos	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD

# TE STYLE BUSHINGS



Each DDIN Bushing is precision machined to work with a specific wire size.

Used to remove aluminum stranding while leaving the steel core stranding untouched.

PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
TE6267	1949.6	42/7	Athabaska	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6268	1926.9	42/19	Cumberland	ACSR-TW/ACSS-TW	DNPSC-1 / DNPSC-1HD
TE6277	636	18/7	Scoter	ACSS-TW/HS285	DNPSC-1 / DNPSC-1HD
TE6280	795	17/7	Toutle	ACSR-TW	DNPSC-1 / DNPSC-1HD
TE6281	795	20/7	Mallard	ACSR-TW	DNPSC-1 / DNPSC-1HD
TE6352	1334.6	39/19	Thames	ACSR-TW	DNPSC-1 / DNPSC-1HD
TE6375	261.5 mm <sup>2</sup>	30/7	Lemon / Darts	ACSR-GZ/ACSRAC AUSTRALIAN	DNPSC-1 / DNPSC-1HD
TE7002	20 mm <sup>2</sup>	6/1	Squirrel	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7004	300 mm <sup>2</sup>	30/7	Goat	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7006	40 mm <sup>2</sup>	6/1	Ferret	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7008	60 mm <sup>2</sup>	6/1	Mink	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7009	60 mm <sup>2</sup>	12/7	Skunk	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7010	400 mm <sup>2</sup>	54/7	Zebra	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7012	75 mm <sup>2</sup>	6/1	Raccoon	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7016	100 mm <sup>2</sup>	6/7	Dog	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7017	100 mm <sup>2</sup>	7/7	Hyena	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7019	125 mm <sup>2</sup>	26/7	Coyote	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7021	150 mm <sup>2</sup>	30/7	Wolf	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7022	175 mm <sup>2</sup>	30/7	Lynx	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7024	225 mm <sup>2</sup>	30/7	Lion	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7025	250 mm <sup>2</sup>	30/7	Bear	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7029	350 mm <sup>2</sup>	54/7	Bison	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7039	300 mm <sup>2</sup>	18/7	Batang	ACSR-British	DNPSC-1 / DNPSC-1HD
TE7210	443.1 mm <sup>2</sup>	13/7	Crane	ACSR-Canadian	DNPSC-1 / DNPSC-1HD
TE7262	644.5 mm <sup>2</sup>	42/7	Scissortail	ACSR-Canadian	DNPSC-1 / DNPSC-1HD
TE7290	316.1 mm <sup>2</sup>	48/7	Peace	ACSR-Canadian	DNPSC-1 / DNPSC-1HD



# TD, TC & TB STYLE BUSHINGS

Each DDIN Bushing is precision machined to work with a specific wire size.

Used to remove aluminum stranding while leaving the steel core stranding untouched.



PART #	CIRCULAR MILS / AWG	STRANDING	CODE WORD	WIRE TYPE	COMPATIBLE TOOL
<b>TD STYLE</b>					
TD1604	1843	72/7	N/A	1.6 Compact	DNPSC-2HD
TD1605	2156	84/19	Bluebird	ACSR/ACSS	DNPSC-2HD
TD1608	2332.8	72/19	N/A	ACSR/ACSS	DNPSC-2HD
TD1609	2167	72/7	Kiwi	ACSS/ACSS	DNPSC-2HD
TD1610	2034.5	72/7	Mockingbird	ACSS	DNPSC-2HD
TD1612	2070	92/19	N/A	AACSR	DNPSC-2HD
TD1615	2312	76/19	Thrasher	ACSS/TW	DNPSC-2HD
TD1616	2515	76/19	Joree	ACSS	DNPSC-2HD
TD1630	1851-T13	54/19	N/A	ACSR	DNPSC-2HD
TD5822	1590	45/7	Lapwing	ACSR-AW	DNPSC-2HD
TD5823	1590	48/7	Hornbill	ACSR/ACSS	DNPSC-2HD
TD5824	1780	84/19	Chukar	ACSR/ACSS	DNPSC-2HD
TD5860	1590	54/19	Falcon	ACSR/ACSS	DNPSC-2HD
TD62BPA	1519	30/7	Deschutes	ACSR/TW	DNPSC-2HD
<b>TC STYLE</b>					
TC1619	2627.3	64/19	Santee	ACSR-TW/ACSS-TW	DNPSC-3HD
<b>TB STYLE</b>					
TB1600	3633	110/7	N/A	ACSR	DNPSC-4HD
TB1603	2839.8	72/7	N/A	ACSR	DNPSC-4HD



## DON'T SEE THE RIGHT BUSHING SIZE?

We can manufacture the exact bushings size you need for your project. Whether your needed bushing is for an American or international conductor, we've got you covered.

**Give us a call to get your custom bushing!**

# GAUGE & COMPRESSION DIES



## IN-LINE GAUGE



- Gauge features an easily readable and highly visible, red Day-Glo® needle
- High-strength, steel bourdon tube ensures high cycle life
- Stainless steel cases and lens locking rings
- High pressure screw-type couplers
- Includes padded, high-impact storage case
- Able to calibrate

PART #	DESCRIPTION	PSI / BAR	WEIGHT
DNGAUGE	In-Line Gauge for 10,000 PSI Pump Press	0 to 15,000 / 0 to 690	3.3 lbs.

## 12 TON COMPRESSION DIES

PART #	INDEX #
DNA1206AH	06AH
DNA1211AH	11AH
DNA1213AH	13AH
DNA1220AH-14AH	20AH-14AH
DNA1272AH	72AH
DNA1273AH-08AH	73AH-08AH
DNA1274AH-10AH	74AH-10AH
DNA1274SH-03SH	74SH-03SH
DNA1275AH-12AH	75AH-12AH

PART #	INDEX #
DNA1273DH-05DH	73DH-05DH
DNA1276AH	76AH
DNA1276SH	76SH
DNA1207CD	07CD
DNA1208CD	08CD
DNA1209CD	09CD
DNA12-N	N
DNA12-D	D



# COMPRESSION DIES

## 60 TON COMPRESSION DIES



PART #	INDEX #
DN6007CD	07CD
DN6008CD	08CD
DN6009CD	09CD
DN6010CD	10CD
DN6040SH	10SH
DN6011AH	11AH
DN6011CD	11CD
DN6012CD	12CD
DN6012SH	12SH
DN6013AH	13AH
DN6013CD	13CD
DN6014CD	14CD
DN6014SH	14SH
DN6015AH	15AH
DN6015CD	15CD
DN6016CD	16CD
DN6016SH	16SH
DN6017CD	17CD

PART #	INDEX #
DN6018SH	18SH
DN6020AH	20AH
DN6020SH	20SH
DN6024AH	24AH
DN6027AH	27AH
DN6030AH	30AH
DN6034AH	34AH
DN6036AH	36AH
DN6038AH	38AH
DN6040AH	40AH
DN6073AH	73AH
DN6074AH	74AH
DN6074SH	74SH
DN6075AH	75AH
DN6075SH	75SH
DN6076.1SH	76.1SH
DN6076AH	76AH
DN6076SH	76SH

## 60 TON DIE STORAGE CASE

- Protective carrying case with foam inserts for die storage

PART #	CAPACITY
DN60-CASE	15 Compression Dies





## 100 TON COMPRESSION DIES



PART #	INDEX #
DN10007CD	07CD
DN10008CD	08CD
DN10009CD	09CD
DN10010CD	10CD
DN10010SH	10SH
DN10011CD	11CD
DN10012CD	12CD
DN10012SH	12SH
DN10013CD	13CD
DN10014CD	14CD
DN10014SH	14SH
DN10015CD	15CD
DN10016CD	16CD
DN10016SH	16SH
DN10017CD	17CD
DN10018CD	18CD
DN10018SH	18SH
DN10019CD	19CD
DN10020AH	20AH
DN10020SH	20SH
DN10024AH	24AH
DN10027AH	27AH
DN10030AH	30AH
DN10034AH	34AH
DN10036AH	36AH
DN10038AH	38AH
DN10040AH	40AH
DN10042AH	42AH

PART #	INDEX #
DN10044AH	44AH
DN10048AH	48AH
DN10074AH	74AH
DN10074SH	74SH
DN10075AH	75AH
DN10075SH	75SH
DN10076AH	76AH
DN100HEX26	HEX26
DN100HEX57	HEX57

## 100 TON DIE STORAGE CASE

- Protective carrying case with foam inserts for die storage

PART #	CAPACITY
DN100-CASE	8 Compression Dies



# RUBBER ACCESSORIES



## SLEEVE BUTTONS

- Two-piece buttons
- Hi-visibility orange
- Screw type
- Nylon



## SLEEVE STRAPS

- Two-piece
- Improved design
- Includes a package of DNB-22 Buttons

PART #	DESCRIPTION	WEIGHT
DNB-22	Pack of 4 Sleeve Buttons	0.2 lb.

PART #	DESCRIPTION	WEIGHT
DNS-1	Sleeve Strap Kit	0.3 lb.



## 2-WAY BLANKET BUTTONS

- Used to secure eyelet-style insulating blankets
- For use with shotgun stick or standard-duty switch stick




## MAGNETIC BLANKET BUTTONS

- Used to secure eyelet-style insulating blankets
- For hard-to-cover areas
- Four permanent floating magnets

PART #	DESCRIPTION	WEIGHT
DNB-23	2-Way Blanket Button	0.3 lb.

PART #	DESCRIPTION	WEIGHT
DNMB-6	Magnetic Blanket Button	0.5 lb.



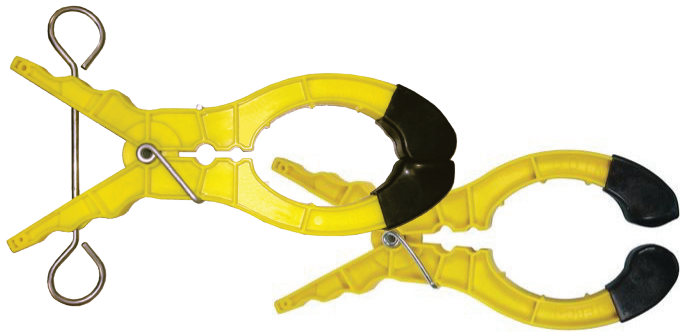

## BLANKET CLAMPS

- Holds insulating blankets and rubber cover-ups in place
- Spring operated for tension
- Notched grooves in body prevent line hose from sliding
- Available with shotgun rings

PART #	DESCRIPTION	WEIGHT
DNBC-1	Nylon Blanket Clamp	0.5 lb.
DNBC-1HS	Nylon Blanket Clamp with Shotgun Rings	0.5 lb.



## BLANKET STRAPS

- Hook and loop cover-up blanket straps
- Sold individually

PART #	LENGTH	WEIGHT
DNTY14	14"	0.2 lb.
DNTY30	30"	0.2 lb.



## BLANKET HOOK

- Holds up to six rubber blankets
- Fits bucket lips up to 2-1/2"



PART #	STOCK DIAMETER	WEIGHT
DNBH-1	1/2" Round	0.5 lb.



# FIBERGLASS ACCESSORIES



## FIBERGLASS ARM SLEEVE KIT

- Designed to protect fiberglass crossarms during use with extension arms (hot-arms) and crossarm bases




PART #	DESCRIPTION	WEIGHT
DNFASKIT	Arm Sleeve Kit	1 lb.
DNFAS	Arm Sleeve Only	1 lb.
DNFAS-1020	Hanger Loop Protector Only	0.1 lb.



## EXTENSION ARM SCREWS


- Available for both Chance and Hastings extension arms
- Comes complete with Hammer Lock Retaining Pins for easy replacement
- Manufactured from the highest quality steel with a unique plating process to ensure smooth, rust-free operation
- Exclusive captive Sliding T-Bar makes for quick and easy installation by hand
- Should your application require a bit more torque, the convenient 3/4" hex end makes quick work of any installation



**SEE HOW QUICK & EASY IT IS TO USE!**




PART #	COMPATIBILITY	COMPATIBLE PART NUMBERS	WEIGHT
DNCES	AB Chance	H480072, H480060, and H480092	0.4 lb.
DNHES	Hastings	7545, 7546, 7548, 7553, 5000, 5001, 5006, 5007, 5036, 5037, 5016, and 5016-1	0.4 lb.

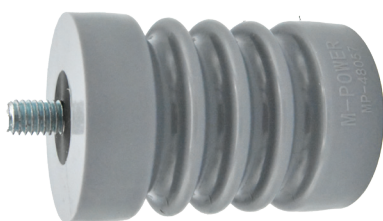


## INSULATOR

- Use on extension arms for up to 34.5kV
- Epoxy based

PART #	WEIGHT
DNINS	1.5 lbs.

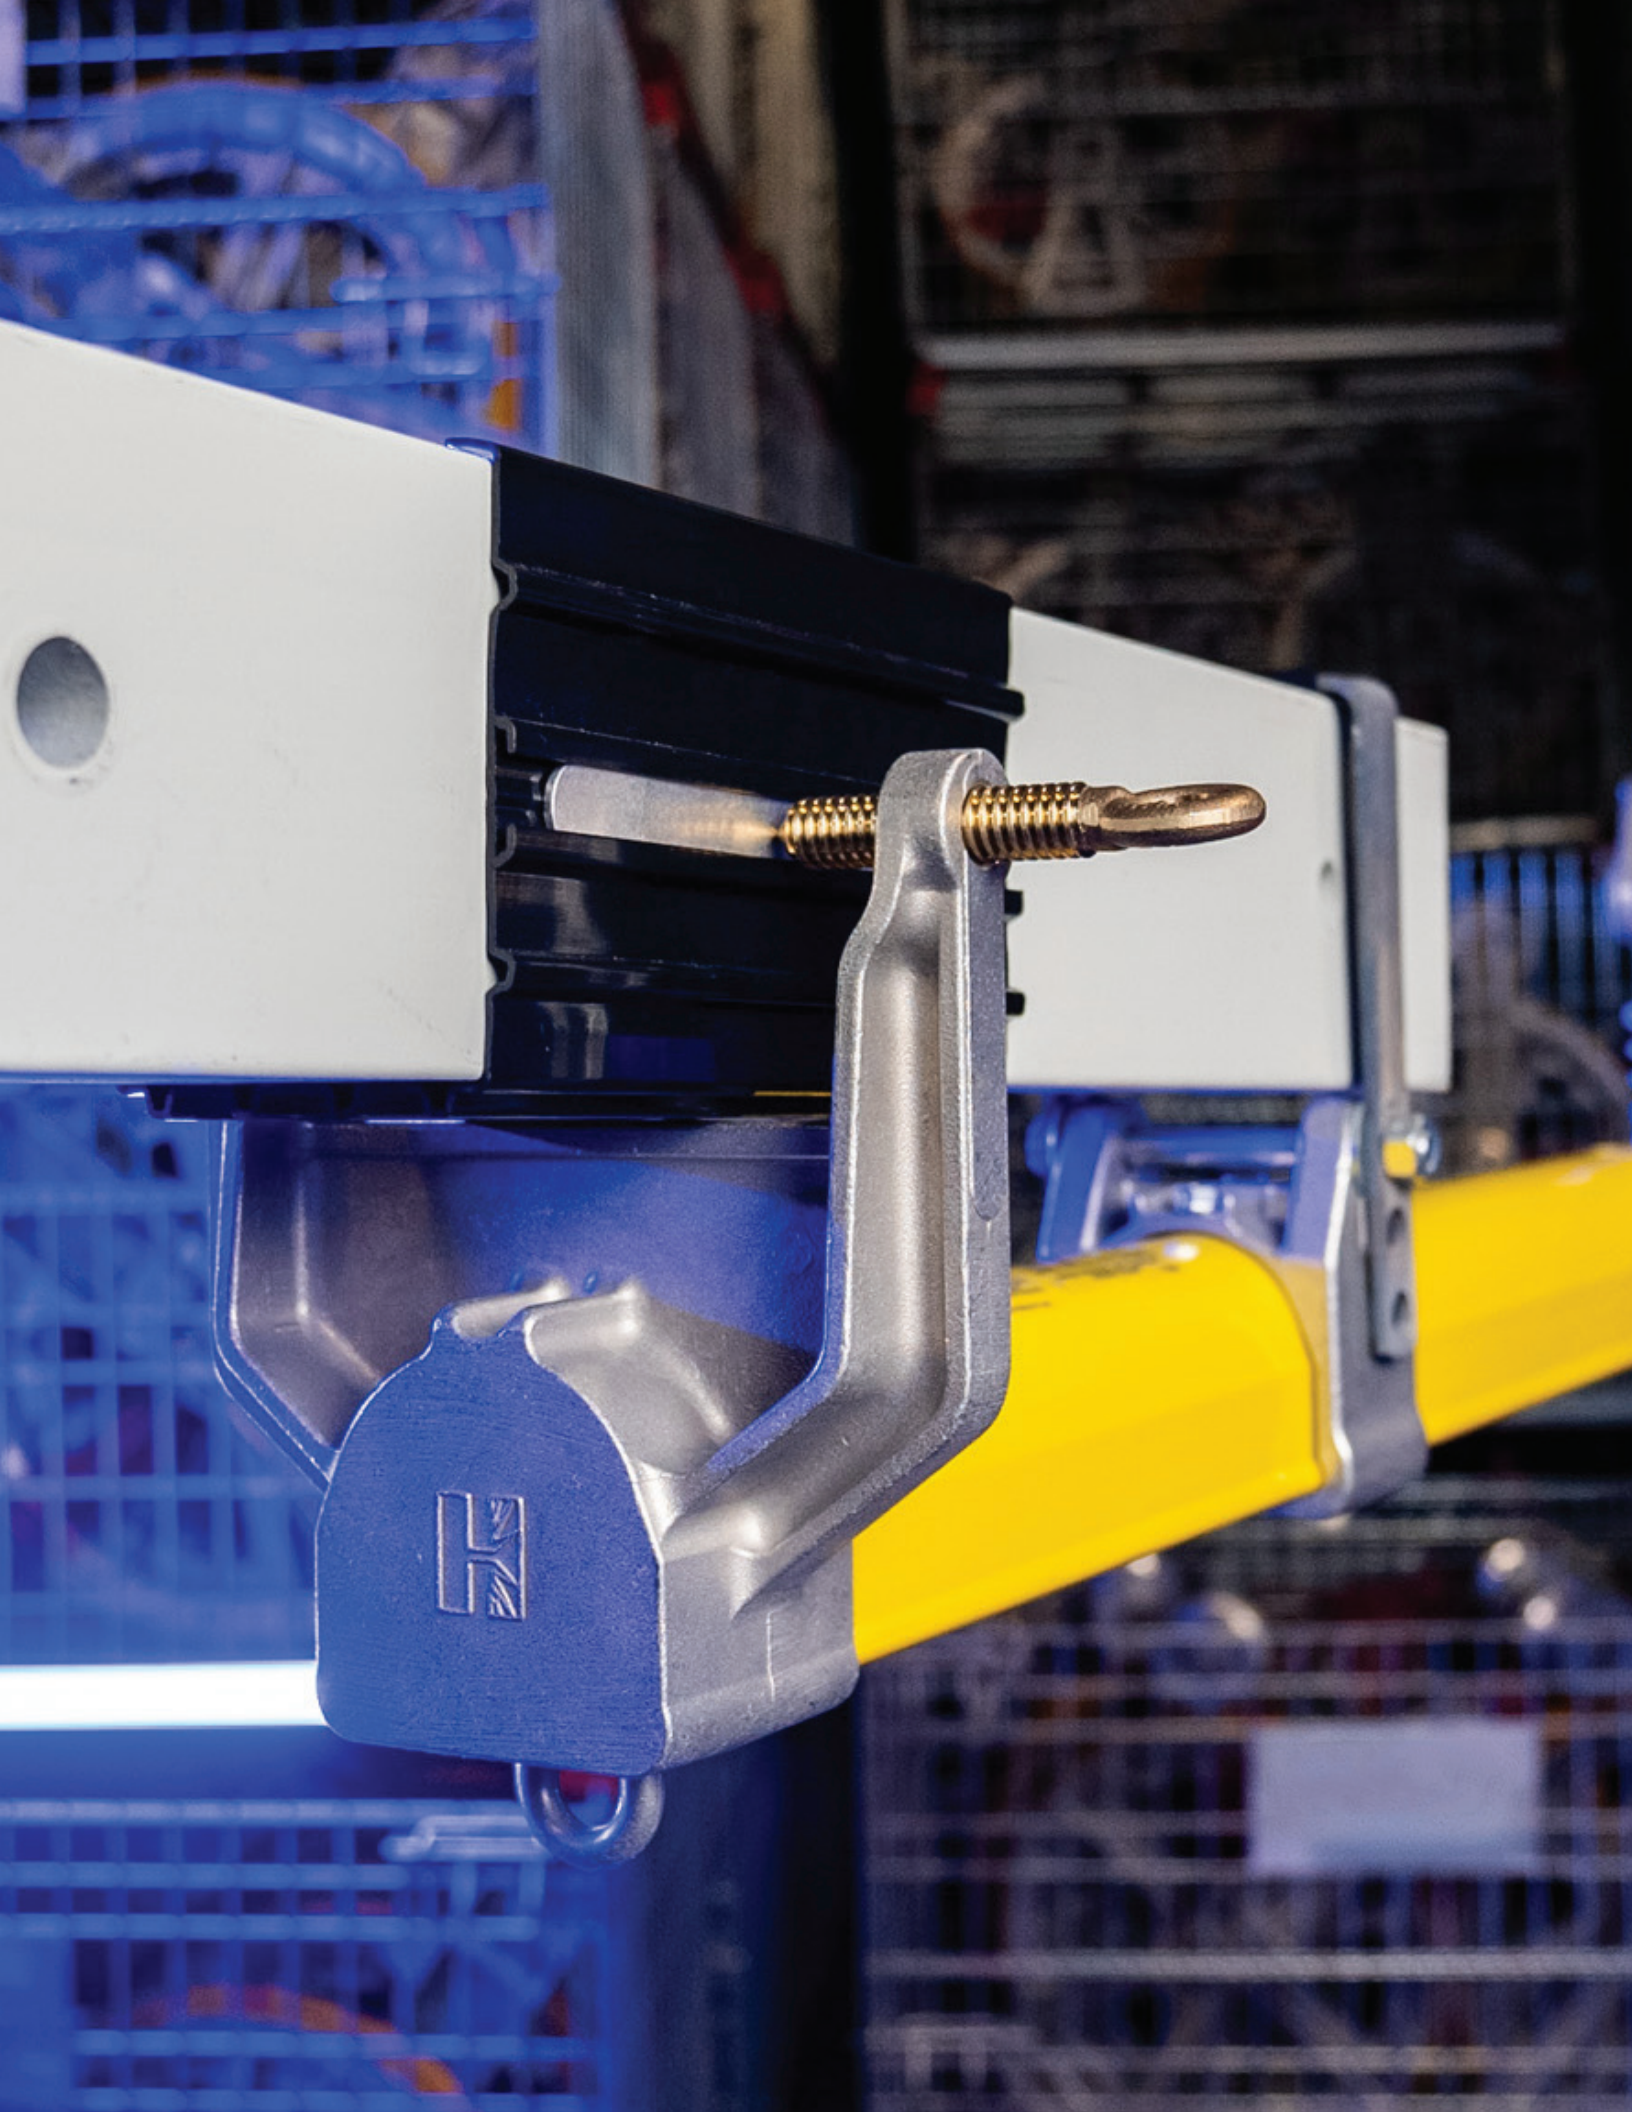



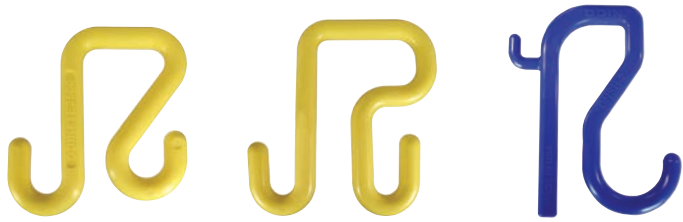

## BUCKET HOOKS

- Made of polymer
- Fits most aerial lift truck buckets


PART #	COLOR	STOCK DIAMETER	COMPATIBLE WITH	WEIGHT
DN2500	Yellow	1 1/16" Round	2" Bucket Lip	0.5 lb.
DN2502	Yellow	1 1/16" Round	3" Bucket Lip	0.5 lb.
DNSH-2	Blue	1 1/16" Round	2" Bucket Lip	0.5 lb.



## CONDUCTOR BRUSHES

- "V" brush can be used for all conductor cleaning requirements
- Available with a polymer handle or universal mounting attachment
- Replacement 2-pack available and works with both handle styles

PART #	HANDLE STYLE	BRUSH HEAD	COLOR	WEIGHT
DNCVB-H	Polymer Handle	"V" Style	Blue	0.5 lb.
DNCVB-U	Aluminum Universal Attachment	"V" Style	Gold	0.5 lb.
DNCVB-RB	N/A	(2) Replacement Heads	N/A	N/A



## UNIVERSAL SHOTGUN ADAPTER

- Converts the hook end of a shotgun stick to a universal fitting



## UNIVERSAL DISCONNECT HEAD

- For opening and closing switches
- Can be used on any length hotstick that has a universal spline fitting

PART #	WEIGHT
DNM1867	0.5 lb.

PART #	WEIGHT
DNUD-1	0.5 lb.





## COTTER PIN TOOL

- Provides additional leverage to bend cotter pins during replacement



PART #	WEIGHT
DNCPT1	0.3 lb.



## HEAT SHRINKABLE TUBING

- Ideal for grounds and jumpers


PART #	DESCRIPTION	WEIGHT
TEBSTS	8" Piece	0.1 lb.
TEBSTS-RL	75' Roll	6 lbs.




## LOCKBACK KNIVES

- 2-1/2" Drop point knife
- Stainless steel pocket clip
- All-metal handle
- Premium quality blade offers superior edge holding

PART #	DESCRIPTION	TOTAL LENGTH	WEIGHT
DNLBK4400-BL	Blue Handle	6"	0.5 lb.
DNLBK4400-CM	Camo Handle	6"	0.5 lb.
DNLBK4400-BK	Black Handle	6"	0.5 lb.

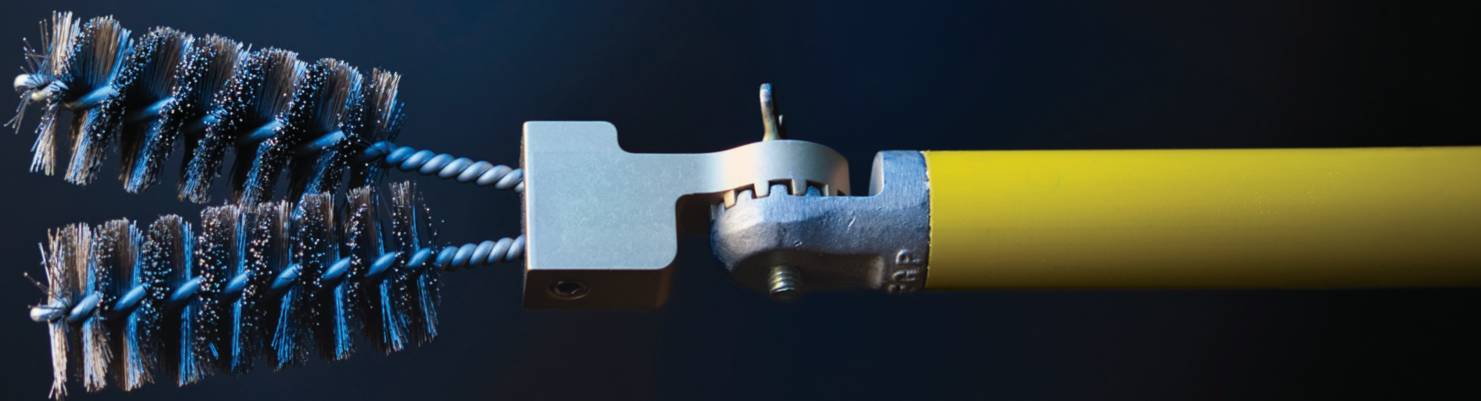



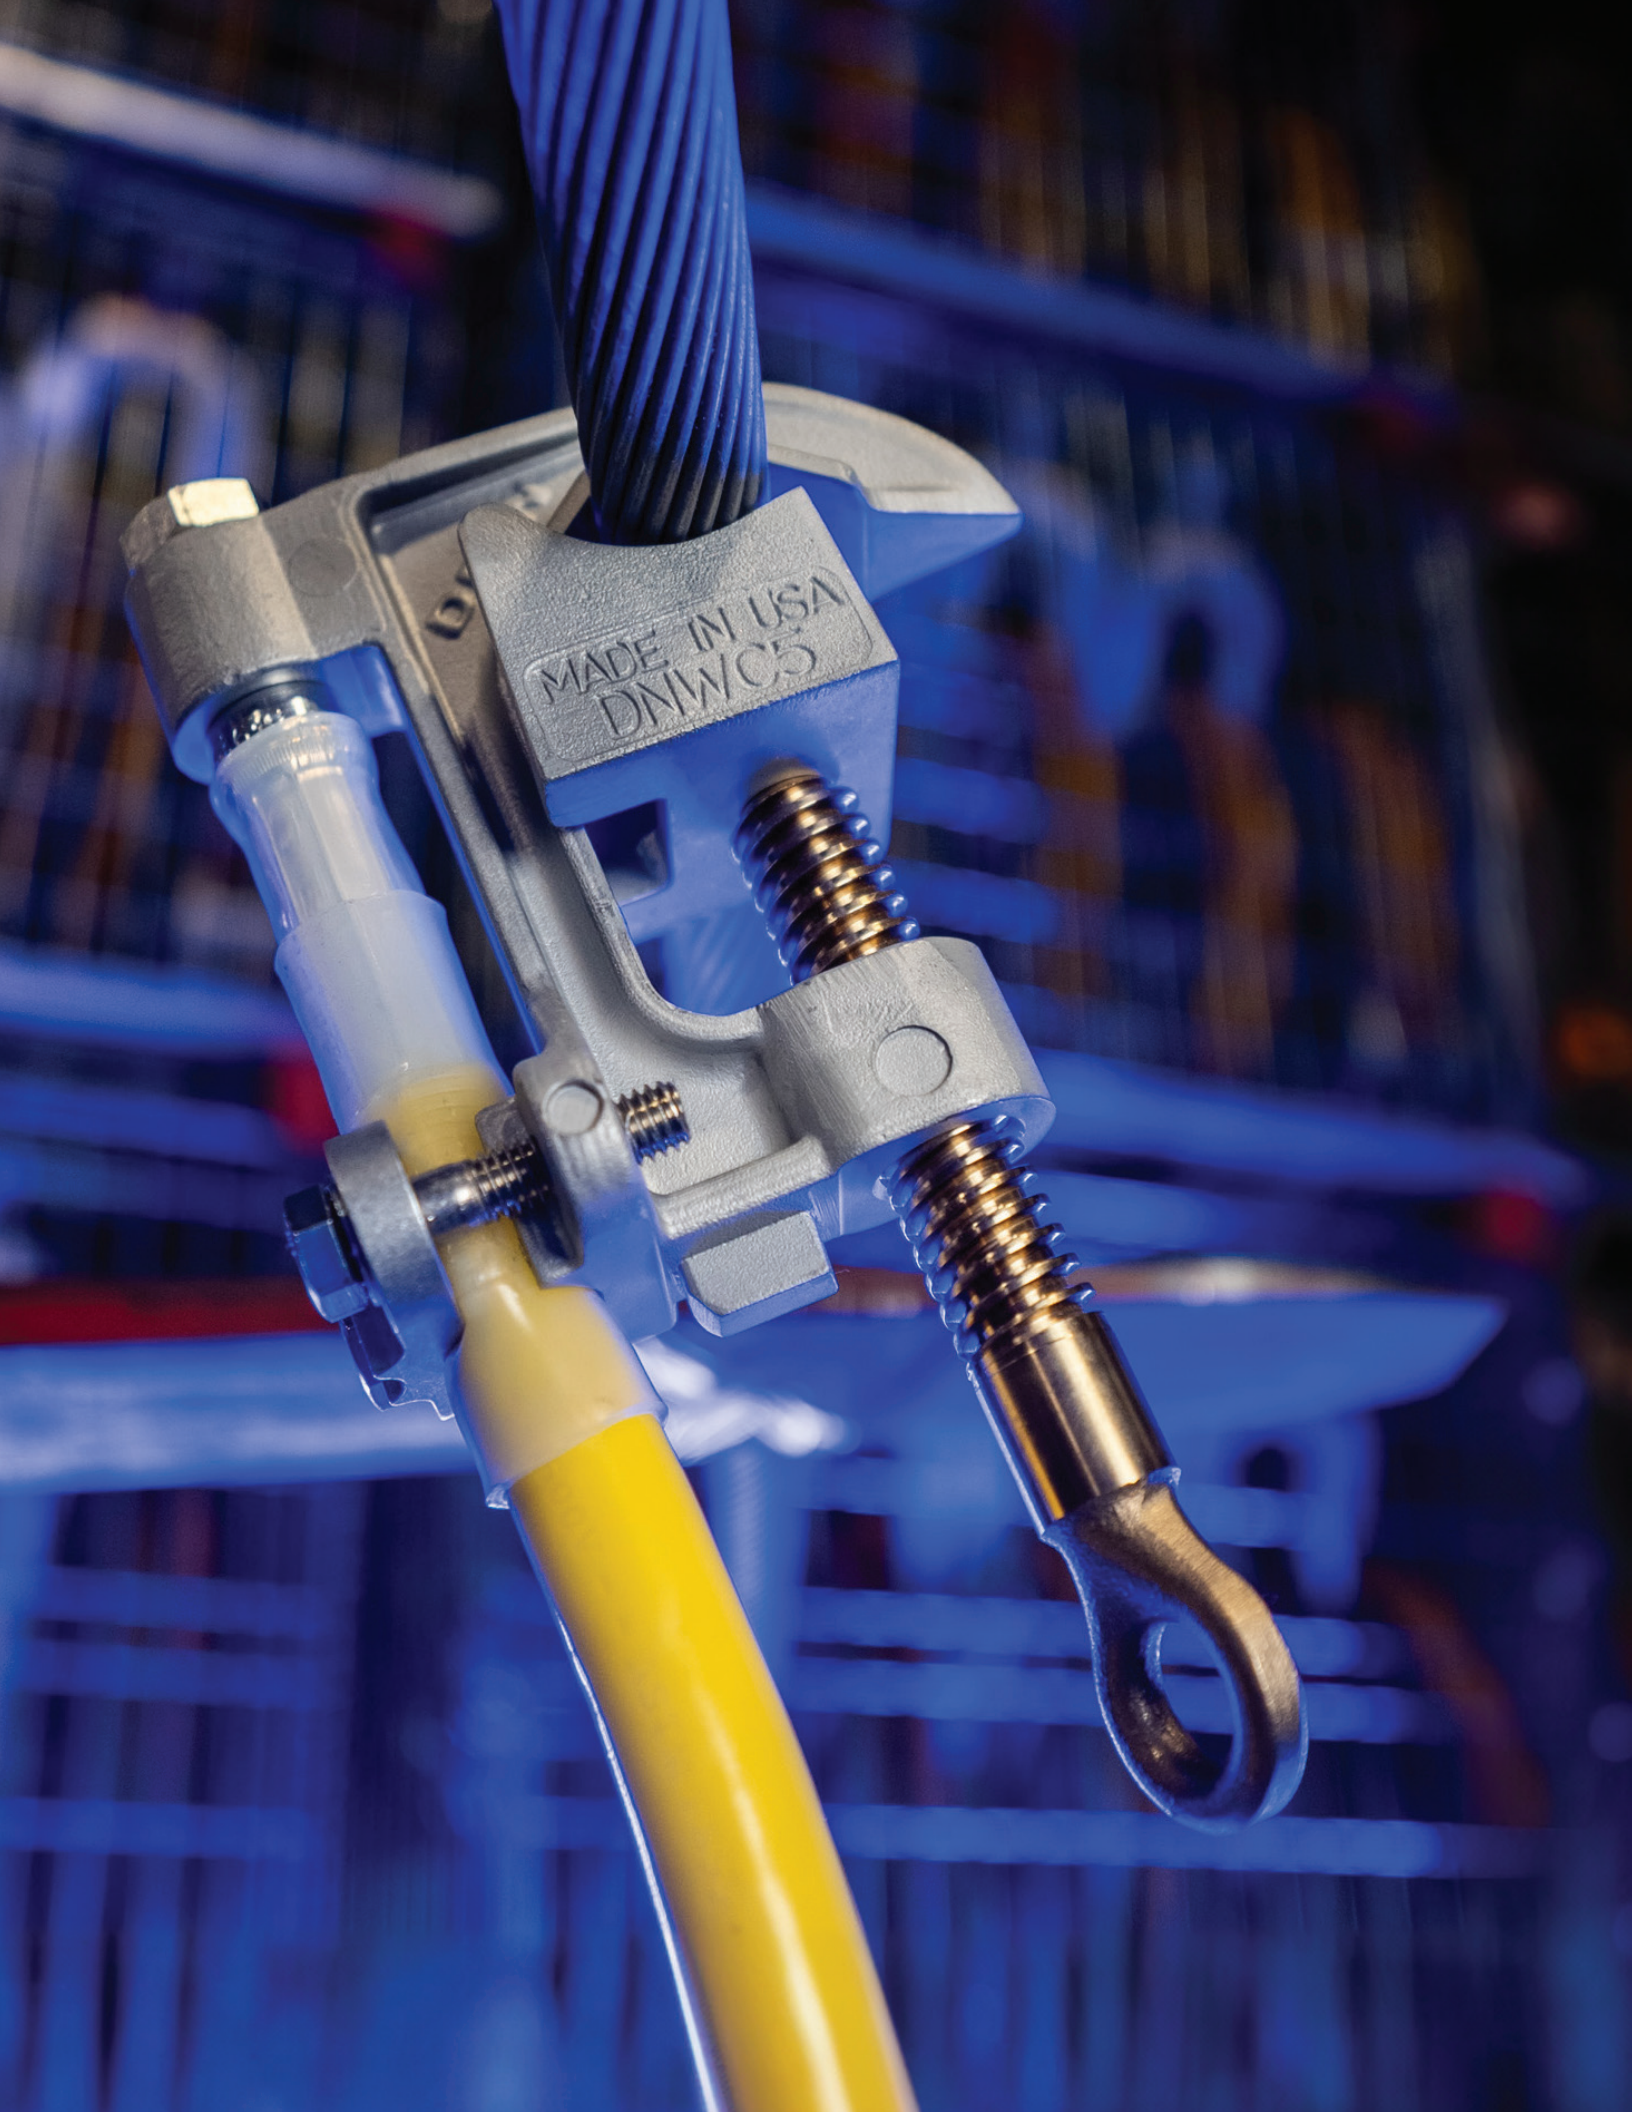

MADE IN USA  
DNW/C5

# ACSR WIRE CHART

CODE WORD	SIZE (AWG OR KCM)	STRANDING	COMPLETE CABLE SIZE
Turkey	6	6/1	.198
Swan	4	6/1	.250
Swanate	4	7/1	.257
Sparrow	2	6/1	.316
Sparate	2	7/1	.325
Robin	1	6/1	.355
Raven	1/0	6/1	.398
Quail	2/0	6/1	.447
Pigeon	3/0	6/1	.502
Penguin	4/0	6/1	.563
Waxwing	266.8	18/1	.609
Partridge	266.8	26/7	.642
Ostrich	300.0	26/7	.680
Merlin	336.4	18/1	.684
Linnet	336.4	26/7	.720
Oriole	336.4	30/7	.741
Chickadee	397.5	18/1	.743
Brant	397.5	24/7	.772
Ibis	397.5	26/7	.783
Lark	397.5	30/7	.806
Pelican	477.0	18/1	.814
Flicker	477.0	24/7	.846
Hawk	477.0	26/7	.858
Hen	477.0	30/7	.883
Osprey	556.5	18/1	.879
Parakeet	556.5	24/7	.914
Dove	556.5	26/7	.927
Eagle	556.5	30/7	.953
Peacock	605.0	24/7	.953
Squab	605.0	26/7	.966
Wood Duck	605.0	30/7	.994
Teal	605.0	30/19	.994
Kingbird	636.0	18/1	.940
Swift	636.0	36/1	.930
Rook	636.0	24/7	.977
Grosbeak	636.0	26/7	.990

CODE WORD	SIZE (AWG OR KCM)	STRANDING	COMPLETE CABLE SIZE
Scoter	636.0	30/7	1.019
Egret	636.0	30/19	1.019
Flamingo	666.6	24/7	1.000
Gannet	666.6	26/7	1.014
Stilt	715.5	24/7	1.036
Starling	715.5	26/7	1.051
Redwing	715.5	30/19	1.081
Coot	795.0	36/1	1.040
Cuckoo	795.0	24/7	1.092
Drake	795.0	26/7	1.108
Tern	795.0	45/7	1.063
Condor	795.0	54/7	1.092
Mallard	795.0	30/19	1.140
Ruddy	900.0	45/7	1.131
Canary	900.0	54/7	1.162
Rail	954.0	45/7	1.165
Cardinal	954.0	54/7	1.196
Ortolan	1033.5	45/7	1.212
Curlew	1033.5	54/7	1.245
Bluejay	1113.0	45/7	1.259
Finch	1113.0	54/19	1.293
Bunting	1192.5	45/7	1.302
Grackle	1192.5	54/19	1.337
Bittern	1272.0	45/7	1.345
Pheasant	1272.0	54/19	1.382
Dipper	1351.5	45/7	1.386
Martin	1351.5	54/19	1.424
Bobolink	1431.0	45/7	1.427
Plover	1431.0	54/19	1.465
Nuthatch	1510.5	45/7	1.466
Parrot	1510.5	54/19	1.505
Lapwing	1590.0	45/7	1.504
Falcon	1590.0	54/19	1.545
Chukar	1780.0	84/19	1.602
Bluebird	2156.0	84/19	1.762
Kiwi	2167.0	72/7	1.735



# INDEX


<b>A</b>		
Accessories	44-49	
Fiberglass	46	
Rubber	44-45	
ACSR Wire Chart	51	
Adapter		
Impact	32	
T-Handle	31	
Adjustable Overhead Transformer Sling	25	
Aluminum		
Framing Stand	28	
Handline Block	23	
Handline Block, 3" Gold Standard	22	
Handline Hook, Latch	24	
Handline Hook, No Latch	24	
Arm Sleeve Kit, Fiberglass	46	
<b>B</b>		
Bag, Mesh	33	
Ball Clevis	9	
Basket, Wire	33	
Blanket		
Buttons, 2-Way	44	
Buttons, Magnetic	44	
Clamps	45	
Hook	45	
Straps	45	
Block		
Clipping	5	
Radius	17	
Rigging	22	
Tower	23	
Uplift	16	
Uplift/Hold Down	16	
Brackets		
Crossarm	9	
Insulator	9	
Bushing		
Holder	34	
TB Style	40	
TC Style	40	
TD Style	40	
TE Style	35-39	
<b>C</b>		
Cant Hook, Transmission Pole	29	
Capacitor Bank Sling	25	
CB-1, Universal Block	6	
CB-1G, Grounded Universal Block	7	
CB-2, Universal Block	6	
CB-2G, Grounded Universal Block	7	
Clamps		
Blanket	45	
Ground	4, 30	
Clipping		
Block	5	
Hook, Heavy-Duty	21	
Hook, Medium-Duty	21	
Hook, Standard	21	
Hook, Vertical Bundle	21	
Compression		
Dies, 100 Ton	43	
Dies, 12 Ton	41	
Dies, 60 Ton	42	
Conductor		
Brush, Polymer	48	
Brush, Universal	48	
Trimmer, Standard	34	
Trimmer, Heavy-Duty	34	
Cotter Pin Tool	49	
Crossarm Bracket	9	
Cutter, Pre-Splice (PSC)	34	
<b>D</b>		
Disconnect Head, Universal	48	
Distribution Flip Socket	32	
Driver, Ground Rod	31	
<b>E</b>		
End Cap Hook	33	
Extension Arm Screws	46	
<b>F</b>		
Ferrules	30	
Fiberglass Arm Sleeve Kit	46	
Fiberglass Accessories	46	
Flip Socket, Distribution & Transmission	32	
Framing Stand, Aluminum	28	
<b>G</b>		
Gauge, In-Line	41	
Ground		
Clamps	4, 30	
Flags, Standard	31	
Flags, Wind-Resistant	31	
Rod Driver	31	
Rod, Screw	31	
Traveling, Standard	18	
Traveling, T2/VR2	18	
Traveling, Torsion Spring	18	
Grounded		
Helicopter, Stringing Block	13	
Helicopter, Wide Stringing Block	13	
Universal Block, CB-1G	7	
Universal Block, CB-2G	7	
Standard Stringing Block	11	
Wide Stringing Block	11	
Grounding Attachments	15	
<b>H</b>		
Handline		
Block, 3" Gold Standard	22	
Block, Aluminum	23	
Block, Nylon	23	
Hook, Bronze	24	
Hook, Rated, Aluminum	24	
Hook, Steel	24	
Heat Shrink Tubing	49	
Heavy-Duty		
Clipping Hook	21	
Conductor Trimmer	34	
Padmount Transformer Sling	27	
Pulling Eye	28	
Helicopter		
Stringing Block, Standard	12	
Stringing Block, Wide	12	
Grounded Stringing Block	13	

Grounded Wide Stringing Blocks	13	Bag, Mesh	33
Universal Block, HB-7	8	Case, 100 Ton Compression Die	43
<b>H</b> ook		Case, 60 Ton Compression Die	42
Blanket	45	Stringing Blocks	
Bucket	48	Standard	10
End Cap	33	Standard, Grounded Helicopter	13
Heavy-Duty Clipping	21	Standard, Grounded	11
Medium-Duty Clipping	21	Standard, Helicopter	12
Standard Clipping	21	Tandem	14
Transmission Pole Cant	29	Wide	10
Vertical Bundle Clipping	21	Wide, Grounded Helicopter	13
		Wide, Grounded	11
<b>I</b>		<b>T</b>	
Impact Adapter	32	T-Handle Adapter	31
In-Line Gauge	41	T2/VR2 Traveling Grounds	18
Insulator	46	Tandem Stringing Block	14
Insulator Brackets	9	TB, TC, and TD Style Bushings	40
<b>L</b>		TE Style Bushings	35-39
Lockback Knife	49	Torsion Spring Traveling Grounds	18
<b>M</b>		Tower Block	23
Magnetic Blanket Button	44	Transformer Slings	
Medium-Duty Clipping Hook	21	Adjustable Overhead	25
Mounting Attachments	9	Capacitor Bank Sling	25
Mud Bucket	29	Single Phase	26
<b>N</b>		Three Phase	26
Nylon Handline Block	23	Three Phase Heavy-Duty	27
<b>P</b>		Three Phase Super-Duty	27
Padmount Transformer Sling		Transmission	
Single Phase	26	Flip Socket	32
Three Phase	26	Pole Cant Hook	29
Three Phase Heavy-Duty	27	Traveling Grounds	
Three Phase Super-Duty	27	Standard	18
Polymer End Cap Hook	33	T2/VR2	18
Pre-Splice Cutter (PSC)	34	Torsion Spring	18
Pulling		Tri-Clamp	4
Eye, Standard	28	Tubing, Heat Shrink	49
Eye, Heavy-Duty	28	<b>U</b>	
<b>R</b>		Universal	
Radius Blocks	17	Block, CB-1	6
Rated Handline Hook	24	Block, CB-2	6
Reel Lift Sling	27	Conductor Brush	48
Reel Lifters	24	Disconnect Head	48
Rigging Block	22	Grounding Attachment	15
Rubber Accessories	44-45	Helicopter Block, HB-7	8
<b>S</b>		Shotgun Adapter	48
Safety Hook	9	Uplift Block	16
Sag Scope	20	Uplift/Hold Down Block	16
Sagometer	20	<b>V</b>	
Sagwatch	20	Vertical Bundle Clipping Hook	21
Screw		<b>W</b>	
Grounding Rod	31	Wide	
Extension Arm	46	Helicopter Blocks	12
Shotgun Adapter, Universal	48	Stringing Blocks	10
Sleeve Buttons	44	Stringing Blocks, Grounded	11
Sleeve Straps	44	Stringing Blocks, Grounded Helicopter	13
Standard		Wire	
Clipping Hook	21	ACSR Chart	51
Stringing Block	10	Basket	33
Traveling Grounds	18	<b>Y</b>	
Steel Wire Basket	33	Y-Ball Clevis	9
Storage			

## VIEW THE NEWEST DDIN PRODUCTS

DDIN is committed to continually solving problems for linemen, and that means constantly working on new products. Since the date of publishing, DDIN has come out with new products, and we don't want you to miss them!

Scan the QR code to the right to always have the latest linemen products at your fingertips.



## PURCHASE DDIN PRODUCTS FROM THESE RETAILERS



888-875-DDIN



© 2024 DDIN | DD1002

DDIN.NET